

UL Standard

- 1.

Use group	B	C	D
Rated Current	30A	—	10A
Rated Voltage	300V	—	300V

- 2.Wire range 18-10AWG

IEC Standard

- 1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	450V
Rate Current(A)	41A

- 2.Wire range:1.0-6mm²

NOTES2:

- 1.Housing: PA66(UL94V-2)
- 2.Current carrier: Steel(Zn Plated)
- 3.Screw: Steel(Zn Plated)

NOTES3:

- 1.Pitch: 10.0mm Poles: 02-24P
2.Stripping length: 9mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order





ULO-TB - PA10HS - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.04.21	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB-PA10HS-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO	ULOTB000A		

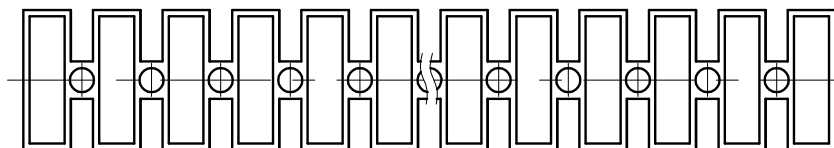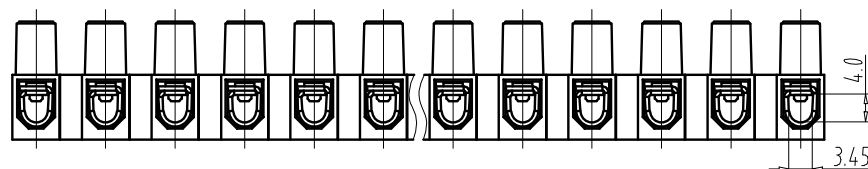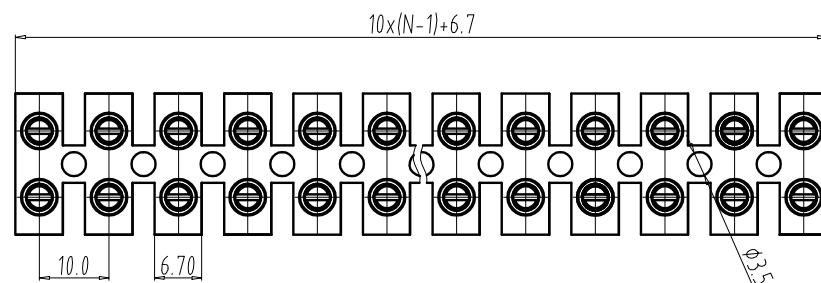

A	Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$		$-$		$//$	
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to all	over 0 to 100	over 100 to 150	over 150 to 200					
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5				