

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	50A	50A	10A
Rated Voltage	300V	150V	300V



2. Wire range 14-8AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	3kV
Rate Voltage(V)	750V
Rate Current(A)	57A

2. Wire range: 1.5-10mm²

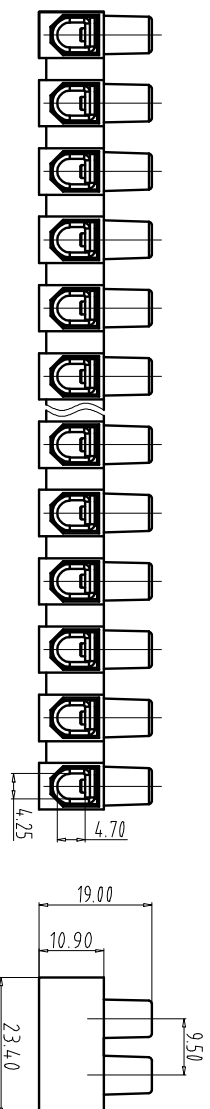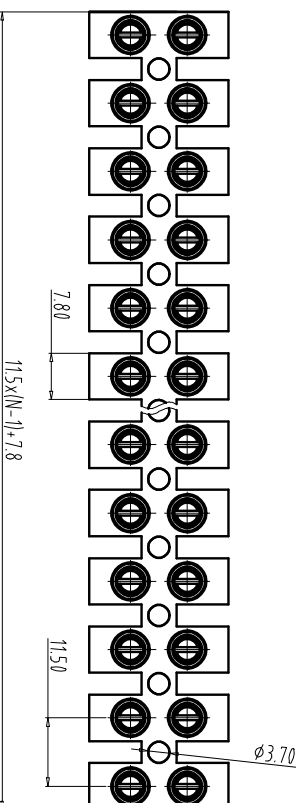

NOTES:

- 1.Housing: PA66(UL94V-2)
- 2.Current carrier: Steel(Zn Plated)
- 3.Screw: Steel(Zn Plated)

NOTES:

- 1.Pitch: 11.5mm Poles: 02-24P
- 2.Stripping length: 9mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB - PA12HS - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- 1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.04.21		UNITS	MM	SHEET/OF	1/1	
CHK.		DATE			SCALE	1:1	A4		
APP.		DATE			NAME	ULO-1B-PA12HS-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD 宁波欧路电子有限公司					DWGNO	UL01BY000A			

Total Pitch Tolerances		Nominal dimension range										—		//								
in mm		in mm																				
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over						
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	100	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	150		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150		
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.5	0.5