

		2		1	
REV	E.C.N NO	CONTENT	CHK	DATE	

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	50A	—	—
Rated Voltage	300V	—	—



2. Wire range 20-8AWG

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	8kV
Rate Voltage(V)	750V
Rate Current(A)	57A

2. Wire range: 2.5-10mm²

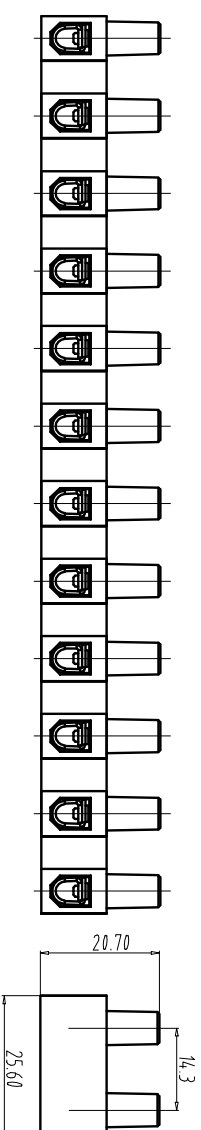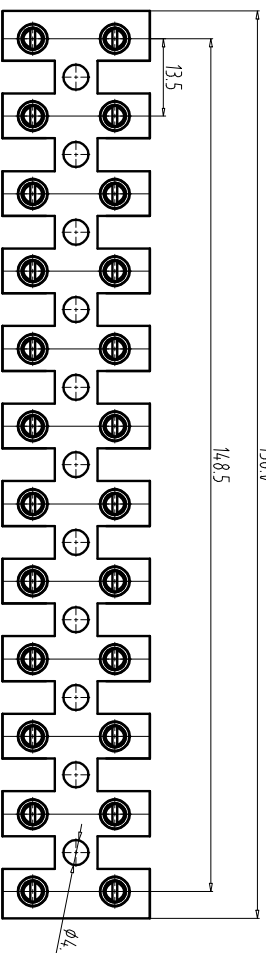

NOTES:

1.Housing: PA66(UL94V-2)

2. Current carrier: Steel(Zn Plated)


3.Screw: Steel(Zn Plated)

NOTES:

1. Pitch: 13.5mm Poles: 12P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

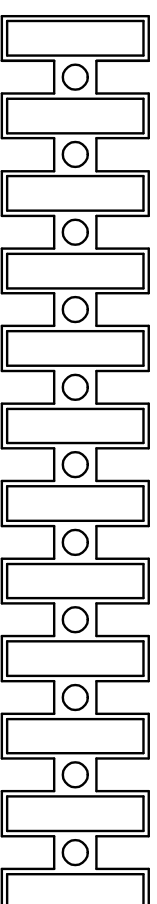

How to order

UL0-TB	-	PA14H	-	12P	-	Y	0	0	0A
--------	---	-------	---	-----	---	---	---	---	----

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

A	Total Pitch Tolerances	Nominal dimension range	±	—	//
---	------------------------	-------------------------	---	---	----

over		in		in		over		over		over		over		over		over		over		over	
over		in		in		over		over		over		over		over		over		over		over	
over		in		in		over		over		over		over		over		over		over		over	
0.18 ± 0.20	0.25 ± 0.3	0.35 ± 0.4	0.55 ± 0.70	0.75 ± 0.20	0.25 ± 0.30	0.35 ± 0.4	0.55 ± 0.70	0.80 ± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
0	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE	
	DWG.	L/Z W			DATE	UNITS	MM	SHEET/OF
CHK.		DATE	21.04.21				A4	
APP.		DATE						



NINGBO UL0 ELECTRONICS CO.,LTD

INAIL	2000-01-01
DWGN0	UL0TBY000A

1