
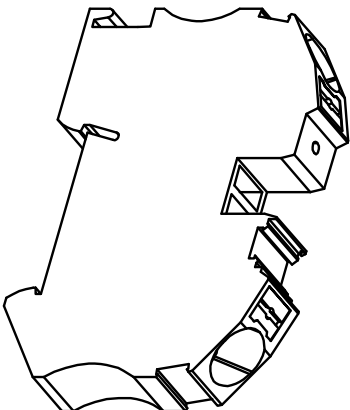
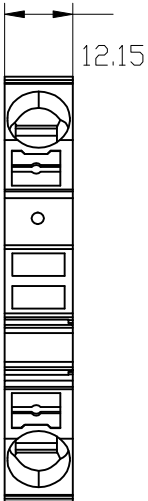
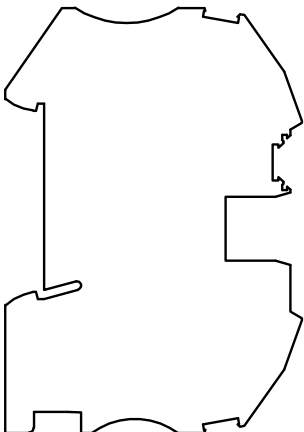

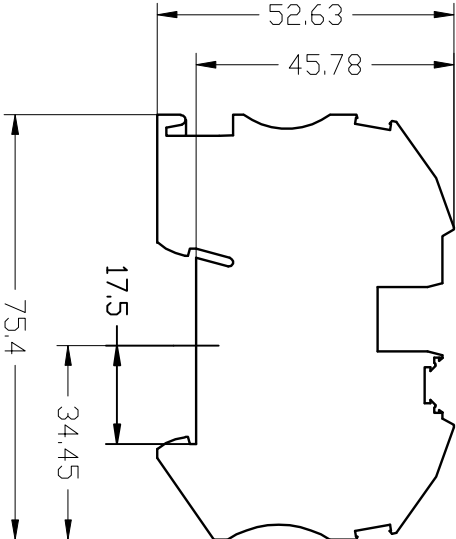


REV	E.C.N NO	CONTENT	CHK	DATE



Technical data:

Product properties

1. Product type: Feed-through terminal block

2. Number of connections: 2

3. Number of rows: 1

4. Potentials: 1

Electrical properties

1. Nominal voltage: 1000V

2. Rated surge voltage: 8KV

3. Nominal current: 76A

4. Maximum load current: 85A

5. Nominal cross section: 16mm²

6. Overvoltage category: III

7. Degree of pollution: 3

8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.5mm²-25mm²

2. Cross section AWG: 20-4

3. Conductor cross section flexible: 0.5mm²-25mm²

4. Conductor cross section, flexible AWG: 20-4

5. Stripping length: 18mm-20mm

2	UL0-TB188-PT 16N BU	Blue
1	UL0-TB188-PT 16N	Gray
ITEM	NAME OF PART	Color
Total Pitch Tolerances		
in mm		
over	over	over
0	30	53
to	to	to
30	53	70
to	to	to
53	70	90
to	to	to
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to
	30	53
	to	to
	70	90
	115	150
	200	250
	320	30
	to	to
	53	70
	to	to
	90	115
	150	200
	250	320
	to	to