

Technical data:

Product properties

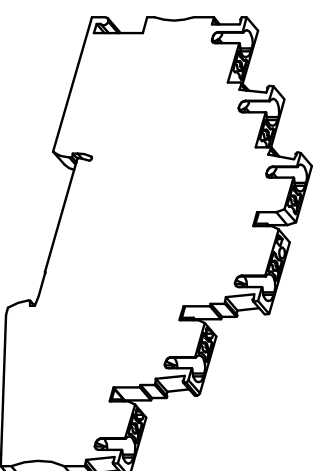
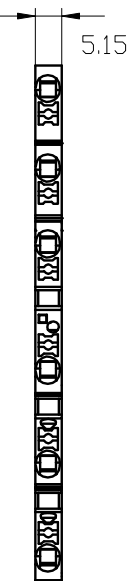
- 1.Product type:Multi-level terminal block
- 2.Number of connections: 6
- 3.Number of rows: 3
- 4.Potentials: 3

Electrical properties

1. Nominal voltage: 500V
2. Rated surge voltage: 6kV
3. Nominal current: 20A
4. Maximum load current: 24A
5. Nominal cross section: 2.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60°C~+110°C

Connection data

1. Conductor cross section rigid: $0.14\text{mm}^2\text{--}4\text{mm}^2$
2. Cross section AWG: 26-12
3. Conductor cross section flexible: $0.14\text{mm}^2\text{--}4\text{mm}^2$
4. Conductor cross section, flexible AWG: 26-12
5. Stripping length: $5\text{mm}\text{--}10\text{mm}$

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	
APP.	DATE				
	NAME			UL0-TB175-P125-3L	
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		