


FILE: 2106.03											
REV		E.C.N. NO.		CONTENT		CHK		DATE			

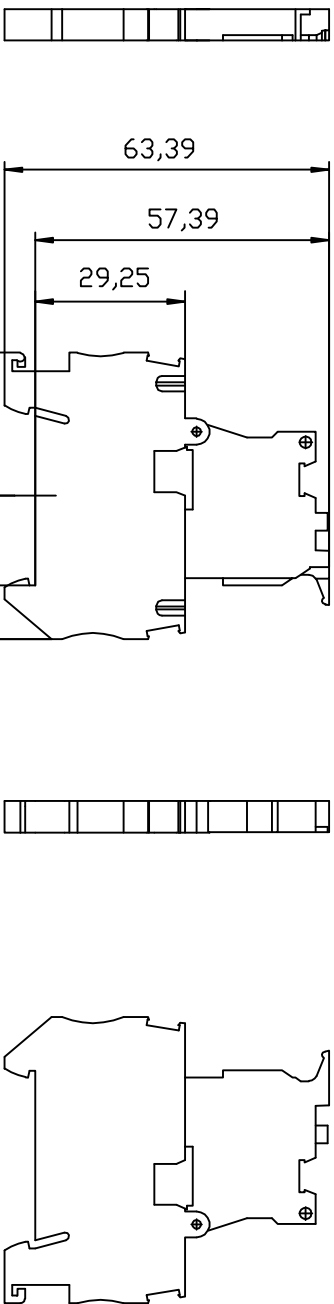

Technical data:

Product properties


1. Product type: Fuse terminal block
2. Number of connections: 2
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 500V
2. Rated surge voltage: 6kV
3. Nominal current: 6.3A
4. Maximum load current: 6.3A
5. Nominal cross section: 4mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: /
9. Insulating material: PA
10. Flammability rating according to UL 94: V0

Connection data

1. Conductor cross section rigid: 0.2mm²-6mm²
2. Cross section AWG: 24-10
3. Conductor cross section flexible: 0.2mm²-4mm²
4. Conductor cross section, flexible AWG: 24-12
5. Stripping length: 10mm-12mm



Total Pitch Tolerances		Nominal dimension range									
in mm		in mm									
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	over	0
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.4 ±0.44 ±0.55 ±0.70 ±0.75 ±0.20 ±0.25 ±0.30 ±0.35 ±0.44 ±0.55 ±0.70 ±0.80 ±0.90		0.2		0.3		0.3		0.2		0.3	
6		5		4		3		2		1	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.11.2	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB120-PT 4-HES(5X20)		

NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司