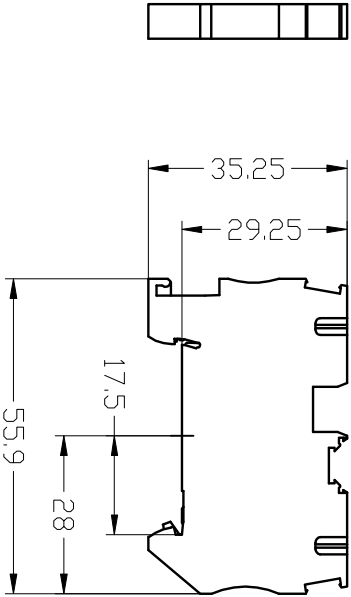


Technical data:

Product properties

1.Product type:Ground terminal block

2.Number of connections: 2

3.Number of rows: 1



4.Potentials: /

Electrical properties

- 1.Nominal voltage: /
- 2.Rated surge voltage: 8KV
- 3.Nominal current: /
- 4.Maximum load current: /
- 5.Nominal cross section: 4mm²
- 6.Overtvoltage category: III
- 7.Degree of pollution: 3
- 8.Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.2mm²-6mm²
2. Cross section AWG: 24-10
3. Conductor cross section flexible: 0.2mm²-6mm²
4. Conductor cross section, flexible AWG: 24-10
5. Stripping length: 10mm-12mm

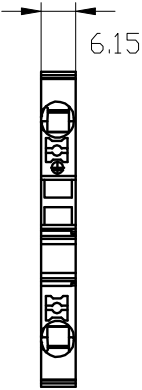

Total Pitch Tolerances												Nominal dimension range												—		//	
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	30	53	70	90	115	150	200	250	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5	0.5	0.5	
6												5												4		3	

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE	
DWG.	SWL		DATE		24.1.12		UNITS		1/1
CHK.	DATE		SCALE		1 : 1		A4		
APP.	DATE		NAME		UL0-TB180-PT4-PE				



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO.

1