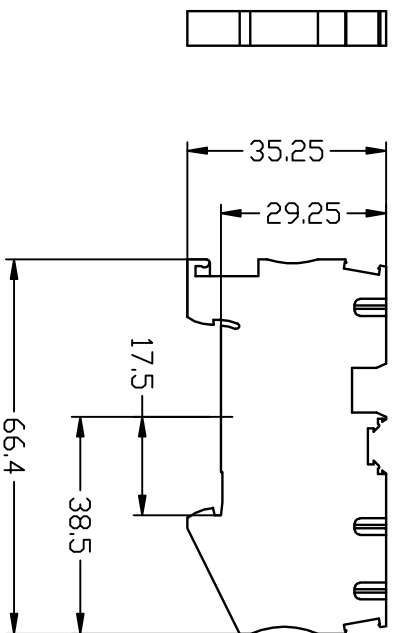


Technical data:

Product properties

1. Product type: Ground terminal block
2. Number of connections: 3
3. Number of rows: 1
4. Potentials: /

Electrical properties

1. Nominal voltage: /
2. Rated surge voltage: 8kV
3. Nominal current: /
4. Maximum load current: /
5. Nominal cross section: 4mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0, 2mm²–6mm²
2. Cross section AWG: 24–10
3. Conductor cross section flexible: 0, 2mm²–6mm²
4. Conductor cross section, flexible AWG: 24–10
5. Stripping length: 10mm–12mm

Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance
		—
		±
		+
		-

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE	
DWG.	SWL	DATE	24.1.12	UNITS	MM	SHEET/OF 1/1
GK.		DATE		SCALE	1 : 1	A4 
APP.	DATE					

NINGBO UL0 ELECTRONICS CO.,LTD.	NAME	UL0-1B180-P14-WIN-PE
宁波欧路电子有限公司	DMGNO.	