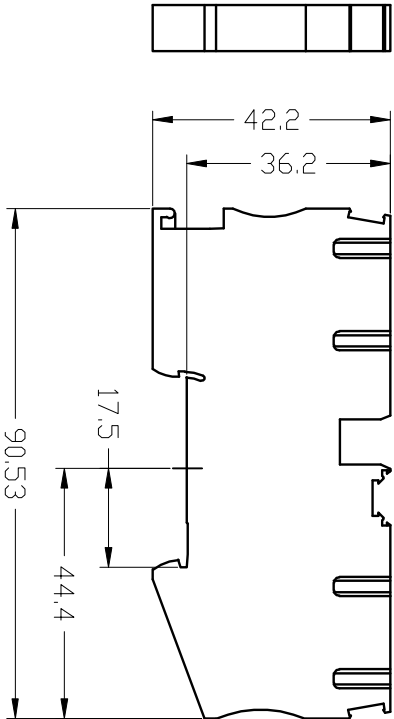


Technical data:

Product properties



- Product type: Multi-conductor terminal block
- Number of connections: 4
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 1000V
- Rated surge voltage: 8KV
- Nominal current: 41A
- Maximum load current: 52A
- Nominal cross section: 6mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.5mm²-10mm²
- Cross section AWG: 20-8
- Conductor cross section flexible: 0.5mm²-10mm²
- Conductor cross section, flexible AWG: 20-8
- Stripping length: 10mm-12mm

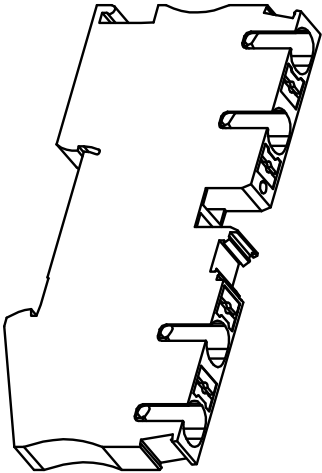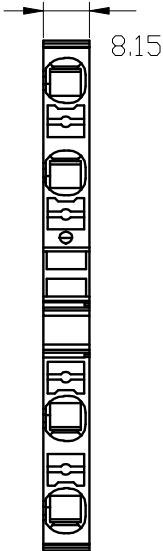

2	UL0-TB184-PT 6-QUATTRO BU	Blue
---	---------------------------	------

1	UL0-TB184-PT 6-QUATTRO	Gray
---	------------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

Total Pitch Tolerances		Nominal dimension range																	
		in mm																	

over	0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3
6																		4	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	24.1.12	UNITS	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4
APP.		DATE		NAME	UL0-TB184-PT6-QUATTRO-XX	



NINGBO UL0 ELECTRONICS CO.,LTD.

DWGNO.

