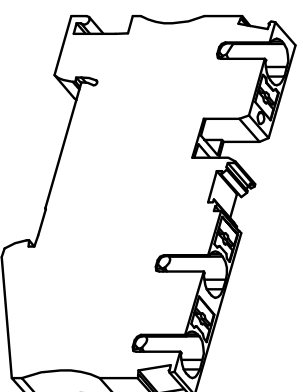
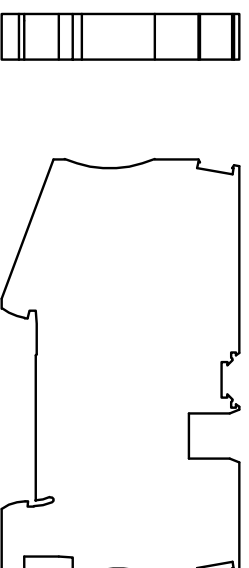
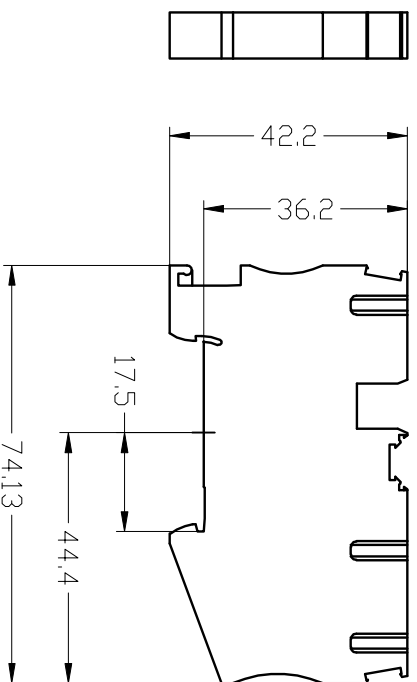


2	UL0-TB184-PT 6-TWIN BU	Blue
1	UL0-TB184-PT 6-TWIN	Gray

A	Total Pitch Tolerances	Nominal dimension range	=	—	//
---	------------------------	-------------------------	---	---	----

[illegible]

Technical data:

Product properties

1. Product type: Multi-conductor terminal block
2. Number of connections: 3
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 1000V
2. Rated surge voltage: 8kV
3. Nominal current: 41A
4. Maximum load current: 52A
5. Nominal cross section: 6mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.5mm^2 – 10mm^2
2. Cross section AWG: 20-8
3. Conductor cross section flexible: 0.5mm^2 – 10mm^2
4. Conductor cross section, flexible AWG: 20-8
5. Stripping length: 10mm – 12mm

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.11.2	MM	SHEET/OF 1/1
CHK.		DATE		1 : 1	A4 
APP.		DATE			
				NAME	