

Technical data:

Product properties





- 1.Product type:Fuse terminal block
- 2.Number of connections: 2
- 3.Number of rows: 1
- 4.Potentials: 1

Electrical properties

- 1.Nominal voltage: 500V
- 2.Rated surge voltage: 6KV
- 3.Nominal current: 6.3A
- 4.Maximum load current: 6.3A
- 5.Nominal cross section: 1mm²
- 6.Overvoltage category: III
- 7.Degree of pollution: 3
- 8.Operating temperature range: /

Connection data

- 1.Conductor cross section rigid: 0.2mm²-6mm²
- 2.Cross section AWG: 24-10
- 3.Conductor cross section flexible: 0.2mm²-4mm²
- 4.Conductor cross section, flexible AWG: 24-12
- 5.Stripping length: 10mm-12mm

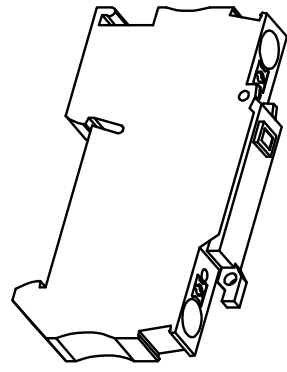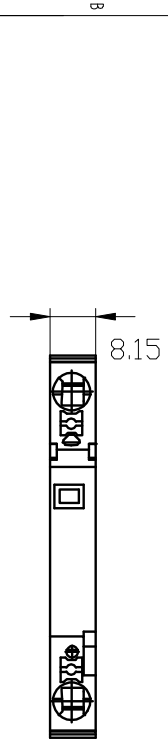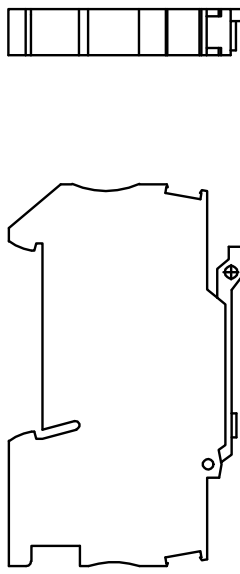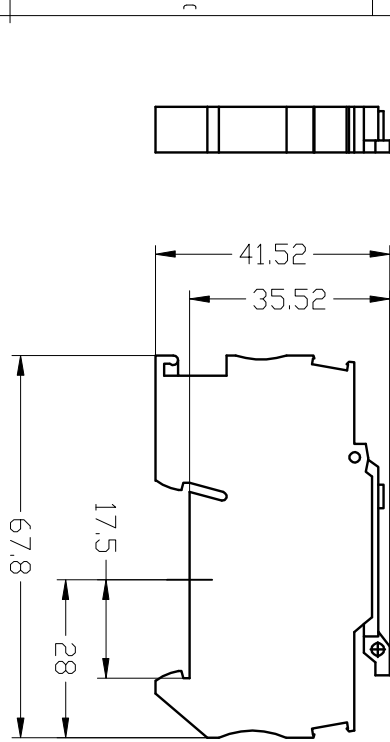

A		Total Pitch Tolerances												Nominal dimension range												—		//	
		in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	100	over	150	over			
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	100	150	to			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10											
6		5												4															
		±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.44 ±0.55 ±0.70 ±0.75 ±0.20 ±0.25 ±0.30 ±0.35 ±0.44 ±0.55 ±0.70 ±0.80 ±0.90												0.2		0.3		0.2		0.3		0.5							

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
	SWL	DATE			MM	SHEET/OF	
DWG.		DATE	24.1.12	UNITS	1 : 1	A4	
CHK.		DATE		SCALE	ULO-TB182-PTC4-HES(SX20)		
APP.		DATE		NAME			
				NINGBO ULO ELECTRONICS CO.,LTD.			
宁波欧路电子有限公司				DWGNO.			
2				1			