
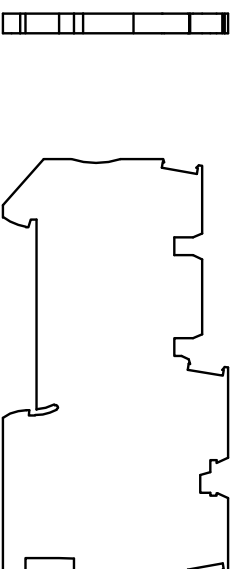


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

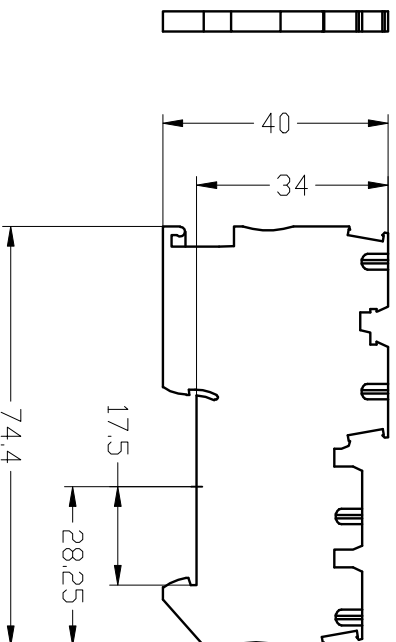

Technical data:

Product properties



- 1.Product type:Sensor/actuator terminal block
- 2.Number of connections: 4
- 3.Number of rows: 2
- 4.Potentials: 3

Electrical properties

1. Nominal voltage: 250V
2. Rated surge voltage: 4kV
3. Nominal current: 13.5A
4. Maximum load current: 13.5A
5. Nominal cross section: 1.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: /

Connection data

1. Conductor cross section rigid: 0.14mm^2 - 1.5mm^2
2. Cross section AWG: 26-16
3. Conductor cross section flexible: 0.14mm^2 - 1.5mm^2
4. Conductor cross section, flexible AWG: 26-16
5. Stripping length: 8mm - 10mm

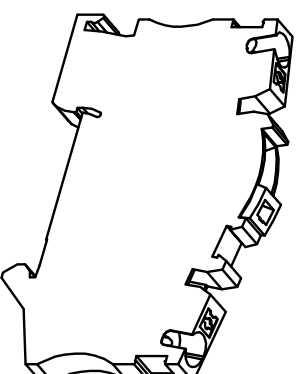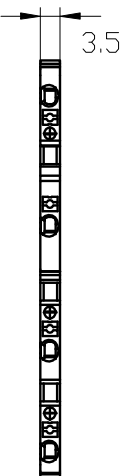

A		Total Pitch Tolerances						Nominal dimension range											
		in mm						in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	
6		5						4											

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			NAME ULO-TB164-PT101.5/5/3		
			DWGNO.		