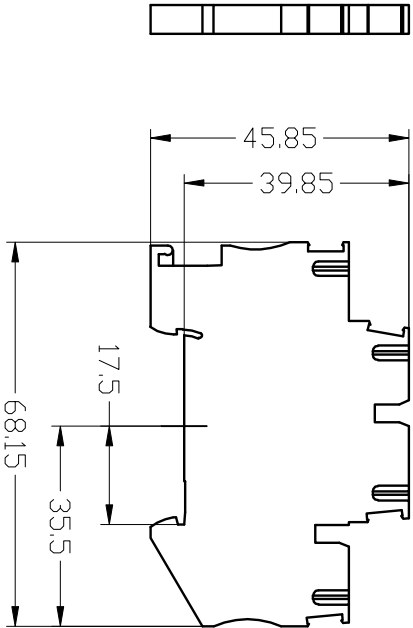


Technical data:

Product properties



- Product type:Multi-level terminal block
- Number of connections: 4
- Number of rows: 2
- Potentials: 2

Electrical properties

- Nominal voltage: 500V
- Rated surge voltage: 6KV
- Nominal current: 22A
- Maximum load current: 26A
- Nominal cross section: 2.5mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.14mm²~4mm²
- Cross section AWG: 26~12
- Conductor cross section flexible: 0.14mm²~4mm²
- Conductor cross section, flexible AWG: 26~12
- Stripping length: 8mm~10mm

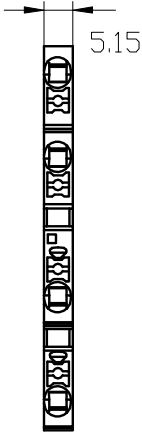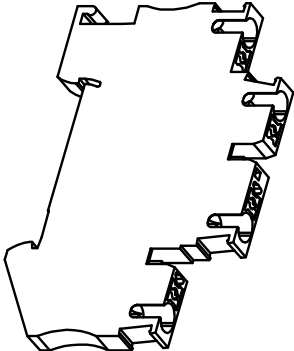

2	UL0-TB168-PTTB 2.5 BU	Blue
---	-----------------------	------

1	UL0-TB168-PTTB 2.5	Gray
---	--------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

Told Pitch Tolerances		Nominal dimension range																—		//	
		in mm																			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	—	—	—	—
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.2	0.5