


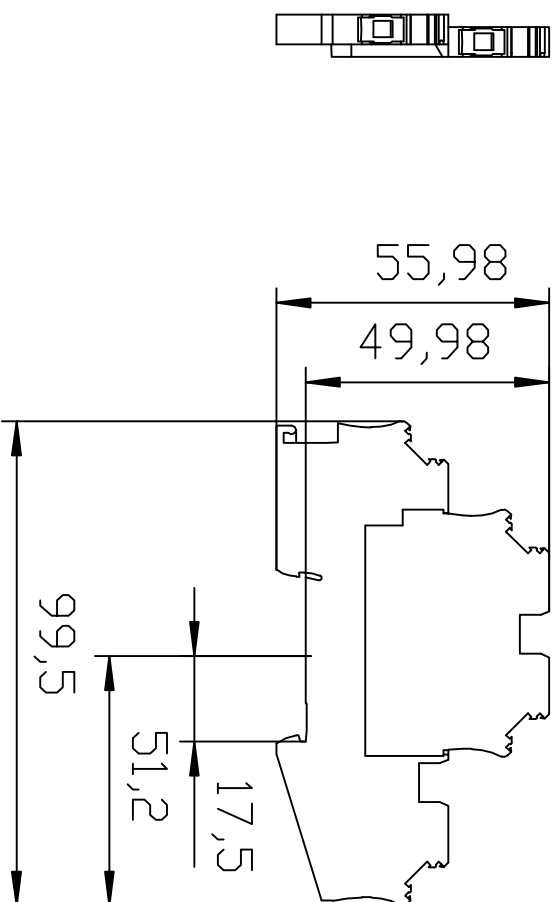

Technical data:

Product properties


1. Product type: Multi-level terminal block
2. Number of connections: 4
3. Number of rows: 2
4. Potentials: 2

Electrical properties

1. Nominal voltage: 1000V
2. Rated surge voltage: 8kV
3. Nominal current: 28A
4. Maximum load current: 32A
5. Nominal cross section: 4mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: /
9. Insulating material: PA
10. Flammability rating according to UL 94: V0

Connection data

1. Conductor cross section rigid: $0.2\text{mm}^2\text{--}6\text{mm}^2$
2. Cross section AWG: 24–10
3. Conductor cross section flexible: $0.2\text{mm}^2\text{--}6\text{mm}^2$
4. Conductor cross section, flexible AWG: 24–10
5. Stripping length: $9\text{mm}\text{--}11\text{mm}$

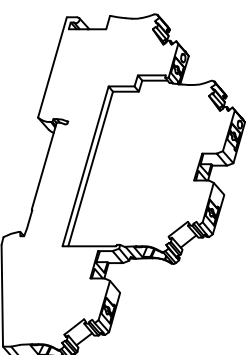

2	UL0-TB110-PTTBV 4 BU	Blue
---	----------------------	------

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance in mm	Surface texture symbol

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE		
DWG.	LZM	DATE	23.12.22	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	ULO-TB110-PTTBV 4-XX		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X	1	