

REV	E.C.N NO	CONTENT	CHK	DATE

Technical data:

Product properties






- Product type:Multi-conductor terminal block
- Number of connections: 3
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 500V
- Rated surge voltage: 6KV
- Nominal current: 17.5A
- Maximum load current: 17.5A
- Nominal cross section: 1.5mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.08mm²-1.5mm²
- Cross section AWG: 28-16
- Conductor cross section flexible: 0.08mm²-1.5mm²
- Conductor cross section, flexible AWG: 28-16
- Stripping length: 8mm-10mm

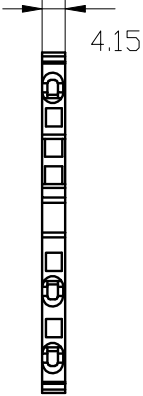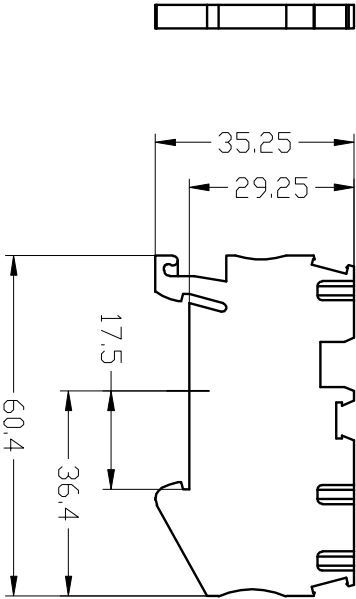

2	UL0-TB250-ST 15-TWIN BU	Blue
---	-------------------------	------

1	UL0-TB250-ST 15-TWIN	Gray
---	----------------------	------

ITEM	NAME OF PART	Color					
Total Pitch Tolerances in mm			Nominal dimension range in mm	+	±	—	//