
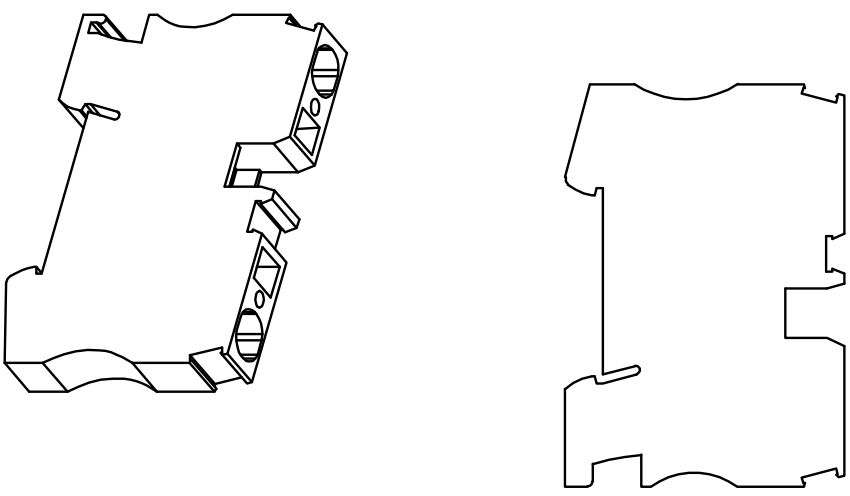
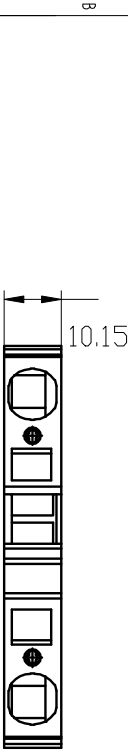


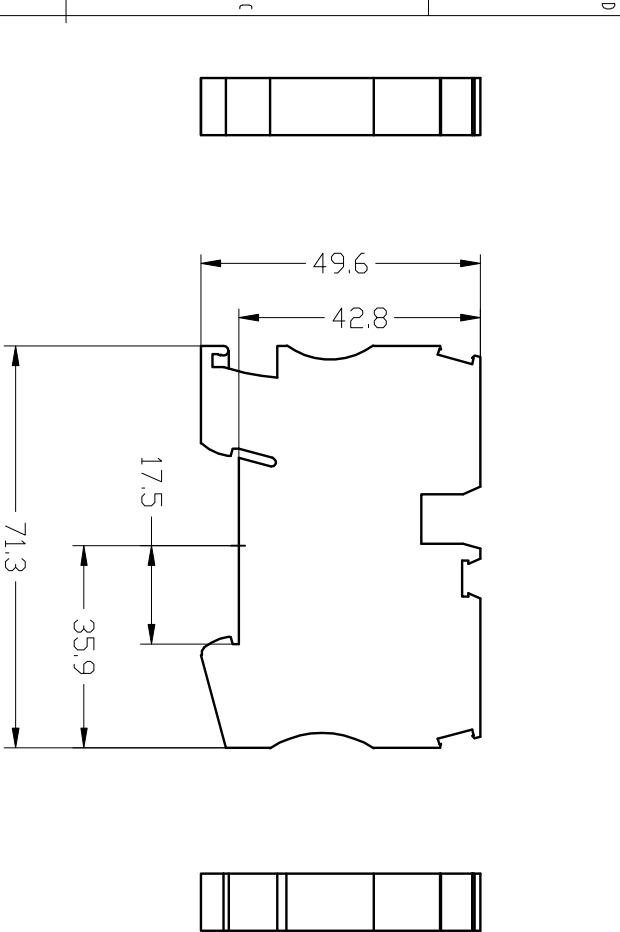

Technical data:

Product properties

- 1. Product type: Feed-through terminal block
- 2. Number of connections: 2
- 3. Number of rows: 1
- 4. Potentials: 1

Electrical properties

- 1. Nominal voltage: 1000V
- 2. Rated surge voltage: 8kV
- 3. Nominal current: 57A
- 4. Maximum load current: 65A
- 5. Nominal cross section: 10mm²
- 6. Overvoltage category: III
- 7. Degree of pollution: 3
- 8. Operating temperature range: -60℃~+110℃

Connection data

- 1. Conductor cross section rigid: 0.2mm²-16mm²
- 2. Cross section AWG: 24-6
- 3. Conductor cross section flexible: 0.2mm²-10mm²
- 4. Conductor cross section, flexible AWG: 24-8
- 5. Stripping length: 18mm

2	UL0-TB263-ST 10 BU	Blue
1	UL0-TB263-ST 10	Gray
ITEM	NAME OF PART	Color
A		
Total Pitch Tolerances in mm		
over 0	over 30	over 53
over 30	over 70	over 90
over 53	over 70	over 90
over 70	over 90	over 115
over 90	over 115	over 150
over 115	over 150	over 200
over 150	over 200	over 250
over 200	over 250	over 320
over 250	over 320	over 30
over 320	over 30	over 53
over 30	over 53	over 70
over 53	over 70	over 90
over 70	over 90	over 115
over 90	over 115	over 150
over 115	over 150	over 200
over 150	over 200	over 250
over 200	over 250	over 320
over 250	over 320	over 10
over 320	over 10	over 10
over 10	over 10	over 100
over 100	over 100	over 150
over 150	over 150	over 0.2
over 0.2	over 0.3	over 0.3
over 0.3	over 0.3	over 0.2
over 0.2	over 0.3	over 0.3
over 0.3	over 0.3	over 0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.	DATE	SCALE	1 : 1	A4	1/1
APP.	DATE	NAME	UL0-TB263-ST10-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.		
NINGBO UL0 ELECTRONICS CO.,LTD.			1		