


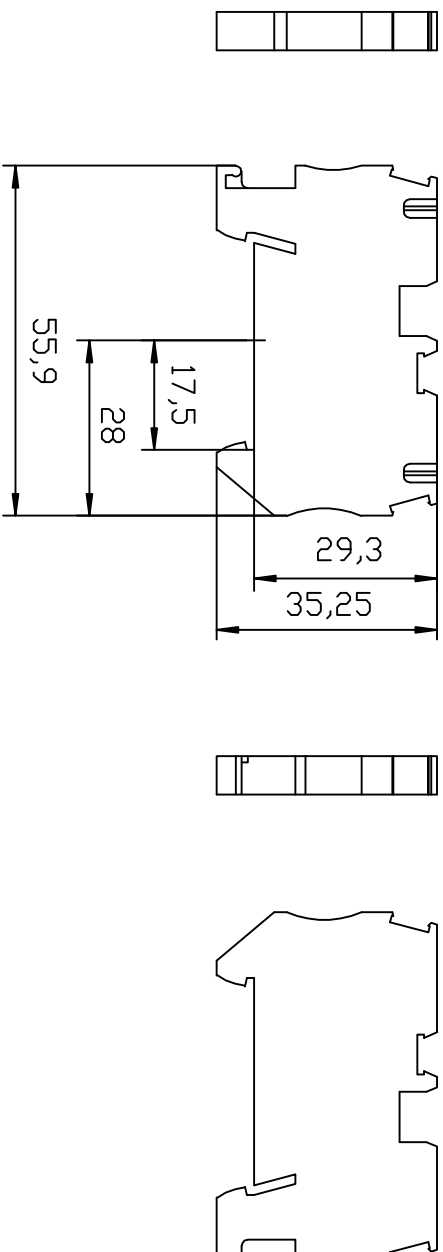

Technical data:

Product properties

- 1.Product type:Feed-through terminal block
- 2.Number of connections: 2
- 3.Number of rows: 1
- 4.Potentials: 1

Electrical properties

1. Nominal voltage: 800V
2. Rated surge voltage: 8KV
3. Nominal current: 32A
4. Maximum load current: 40A
5. Nominal cross section: 4mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃
9. Insulating material: PA
10. Flammability rating according to UL 94: V0

Connection data

1. Conductor cross section rigid: 0.08mm^2 - 6mm^2
2. Cross section AWG: 28-10
3. Conductor cross section flexible: 0.08mm^2 - 4mm^2
4. Conductor cross section, flexible AWG: 28-12
5. Stripping length: 8mm - 10mm

2	ULO-TB130-ST 4 BU	Blue
---	-------------------	------

Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance symbol
		—
		//

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL		NOTE
DWG.	SWL	DATE	24.1.12	MM	SHEET/OF	1/1
CHK.		DATE		1 : 1	A4	
APP.		DATE				
				NAME		

