

FILE: 2021-D01VULO					
REV	ECN NO.	CONTENT	CHK	DATE	

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
2.withstanding voltage: AC1600V/1Min

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:

- 1.Housing: PA66(UL94V-0)
2. Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 3.50mm Poles: 2xXXP
2.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order



ULO-TB01 - 15KNRHG/3.5 - 2xXXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

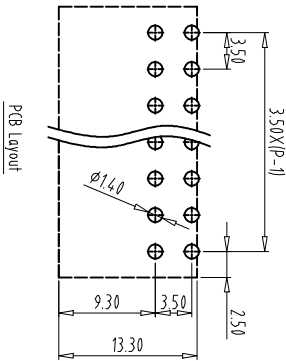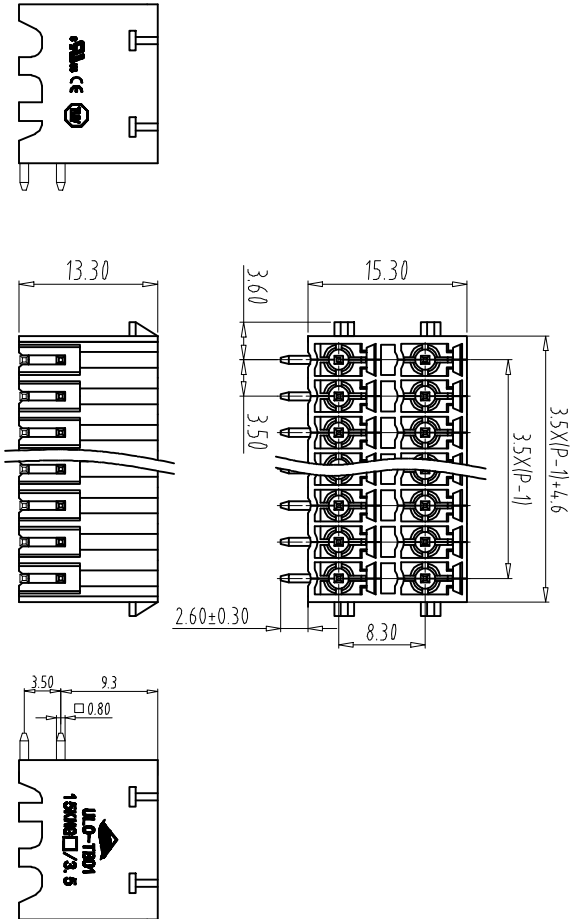

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	0	over	0	over	0	over	0	over	0
30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	all
53	70	90	115	150	200	250	320	10	100
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
6	6	6	6	6	6	6	6	6	6



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0-TB01-15KNRHG/3.5-2xXXP-4000A

UL0TBOY000A