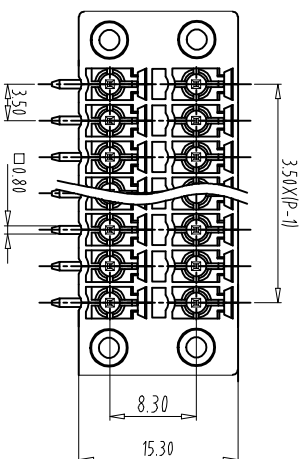



NOTES:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES:

1. Pitch: 3.50mm Poles: 2x(02-24)P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB01 - 15KNRHM/3.5 - 2xXXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES:

UL Standard

1. Rating voltage/current: 300V/8A

2.withstanding voltage: AC1600V/1Min

IEC Standard

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.10.13	UNITS	MM	SHEET/OF 1/1
CHK	DATE		SCALE	1:1	
APP.	DATE				

NINGBO UL0 ELECTRONICS CO.,LTD.

REV:1.0

NINGBO UL0 ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO.	ULOTB01Y000A
--------	--------------