

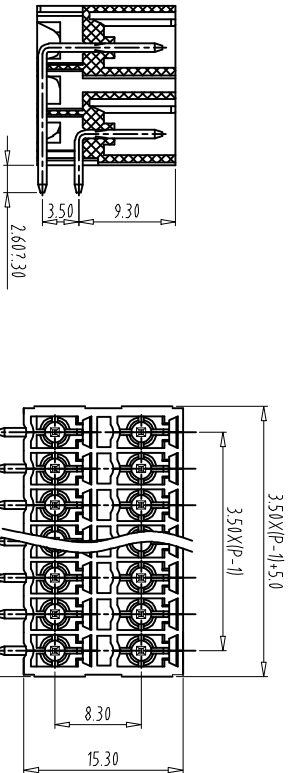
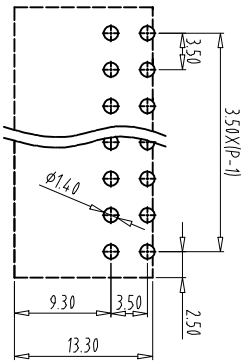



FILE: 2020-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE



SECTION A-A



- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

How to order
UL0-TB01 - 15KMRH/3.5 - 2xXXP - Y 0 0 0A

Certificate
Series NO. Factory Code poles

Customer requirements

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Brass(Sn Plated)

- NOTES3:
- 1.Pitch: 3.50mm Poles: 2x(02-24)P
 - 2.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

- NOTES1:
- UL Standard
- 1. Rating voltage/current: 300V/8A
 - 2.withstanding voltage: AC1600V/1Min
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

Total Pitch Tolerances										Nominal dimension range												
in mm										in mm												

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3
6									5									4				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZJL	DATE	20.11.27	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	UL0-TB01-15KMRH/3.5-2xXXP-Y000A
				DWGNO.	UL0TB01Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司