

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	—
Rated Voltage	150V	50V	—

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V

2. Rating voltage/current: 160V/8A

NOTES2:

- 1.Housing: PA10T (UL94V-0)
- 2.Long Solder pin: Copper (Sn Plated)
- 3.Short Solder pin: Copper (Sn Plated)

NOTES3:






- 1.Pitch: 3.50mm Poles: 2xXXP
- 2.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB02 - 15RHCM/3.5 - XXP - Y 000A

Certificate Factory poles
Series NO. Code

Customer requirements color:
1:Grey 5:Orange
2:Blue 6:Red
3:Black 7:transparent
4:Green 8:Yellow
9:White

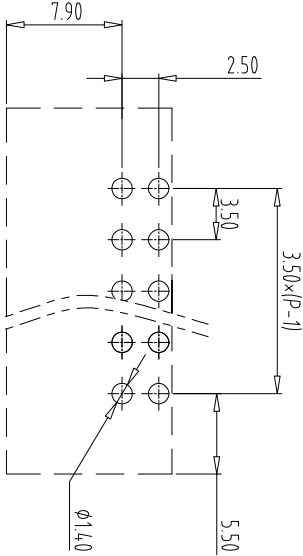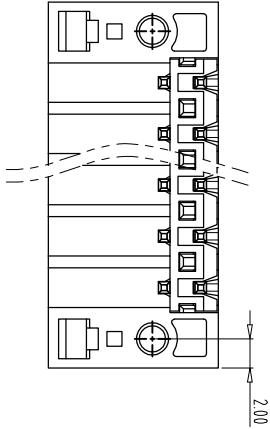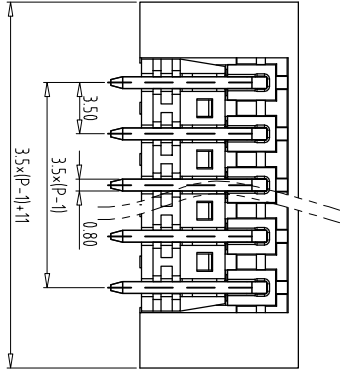

PCB LAYOUT

Total Pitch Tolerances				Nominal dimension range				—		//	
in mm				in mm							
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	100	100
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10	150	150
$\pm 0.18 \pm 0.20 \pm 0.25 \pm 0.3 \pm 0.35 \pm 0.44 \pm 0.55 \pm 0.70 \pm 0.75 \pm$											