


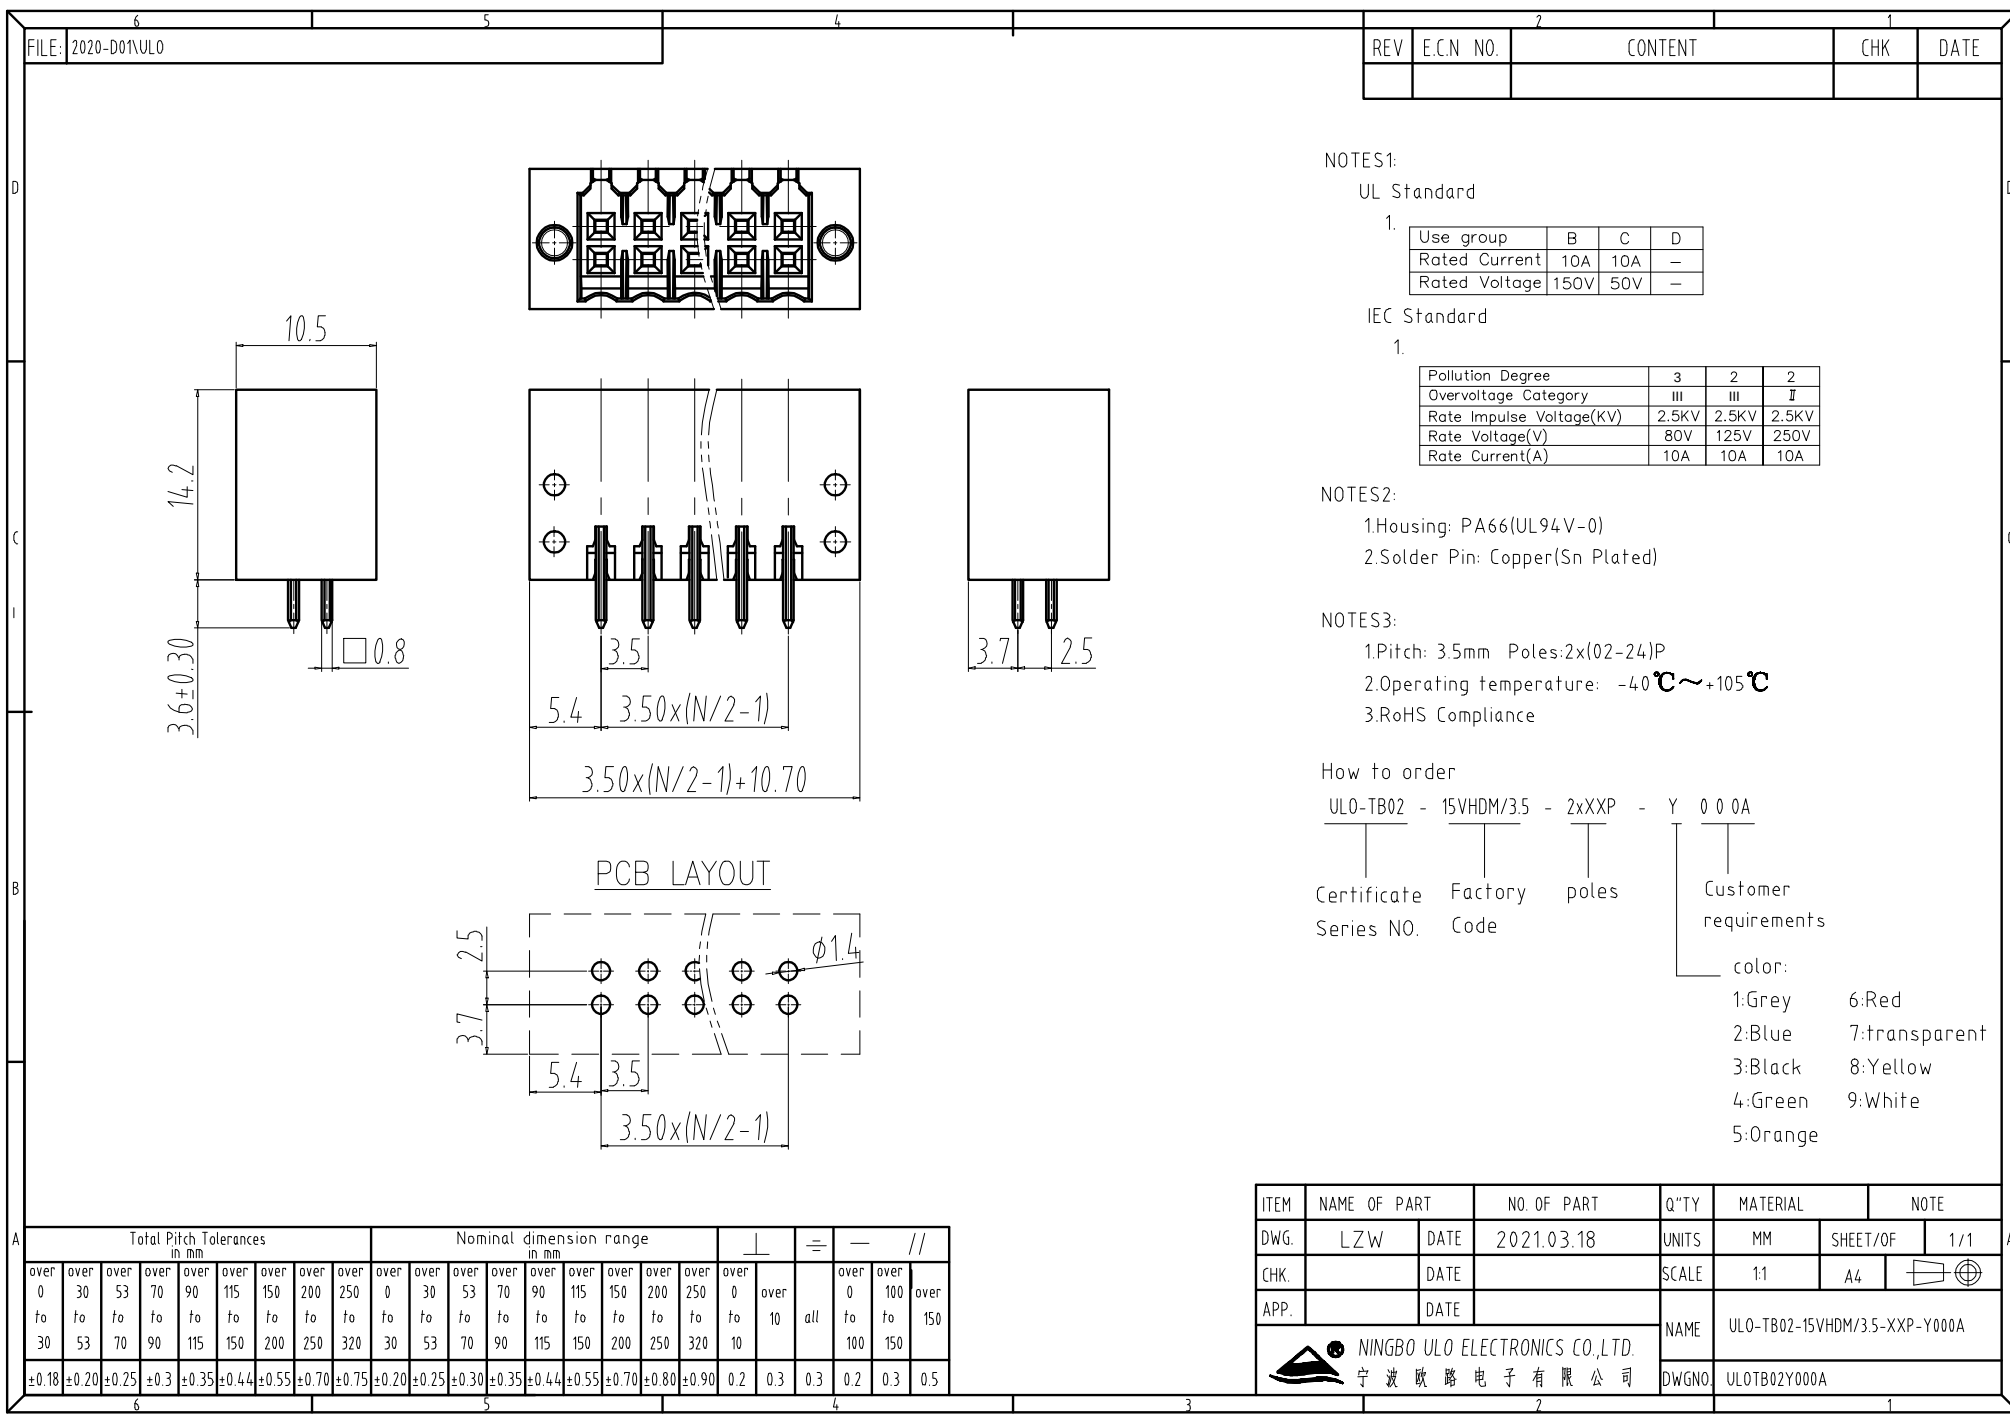

FILE: 2020-D01VUL0

REV E.C.N NO. CONTENT CHK DATE

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	10A	10A	—
Rated Voltage	150V	50V	—

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	80V	125V	250V
Rate Current(A)	10A	10A	10A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Copper(Sn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles:2x(02-24)P
- 2.Operating temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
- 3.RoHS Compliance

How to order

UL0-TB02 - 15VHDM/3.5 - 2xXXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	2021.03.18	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB02-15VHDM/3.5-XXP-Y000A	DWGNO.	UL0TB02Y000A
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					