

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1. Rating voltage/current: 300V/10A

2. Wire range: 18~24AWG

IEC Standard

→

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	130V
Rate Current(A)	10A

2.wire range: 0.5-1.0mm²

3. Torque value: M_2 , 0.2Nm

NOTES:

1.Housing(2P): PA66(UL94V-0)

2. Cage: Brass (Sn Plated)

3.Spring: Stainless Steel

4. Screw: Steel (Zn Plated/M2.0)

5.Housing(3P): PA66(UL94V-0)

NOTES:

1.Pitch: 3.50mm Poles: 02-24P

2. Stripping length: 5mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB11 - 350/3.5 - XXP - Y 00 0A






Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

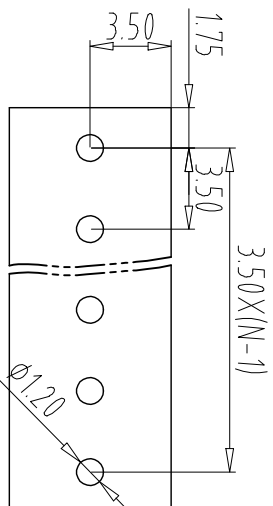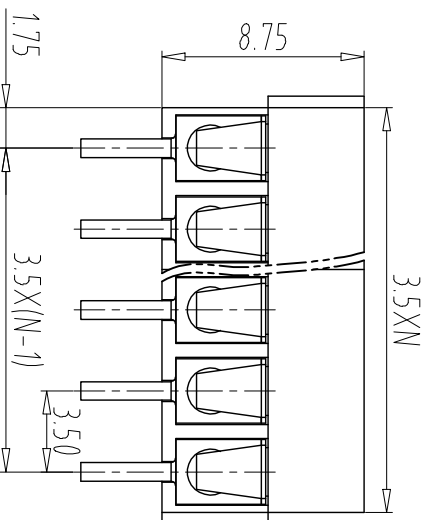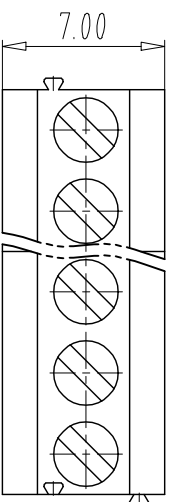

Total PRT		Tolerances		Nominal dimension		range		T		=		—		//	
over	over	in	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
0.18±0.20	0.25±0.3	0.35±0.44	0.55±0.70	0.75±0.20	0.25±0.30	0.35±0.44	0.55±0.70	0.80±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.06.02	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4 
APP.		DATE	NAME	ULO-IBH-350/35-XXP-Y000A	
 NINGBO ULO ELECTRONICS CO.,LTD 宁波欧路电子有限公司			DWGNO	ULOTBHY000A	



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.	ULOTB11Y000A
--------	--------------