





FILE: 2020-D01VUL0		REV		ECN NO.		CONTENT		CHK	DATE
--------------------	--	-----	--	---------	--	---------	--	-----	------



NOTES1:
UL Standard
1. Rating voltage/current: 150V/10A
2 Wire range: 16~26AWG
IEC Standard
1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	10A

2 wire range: 0.2-1.0mm²

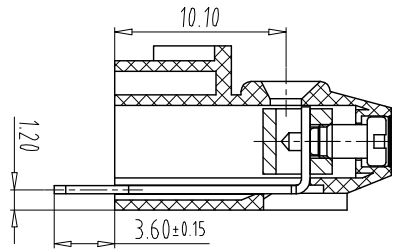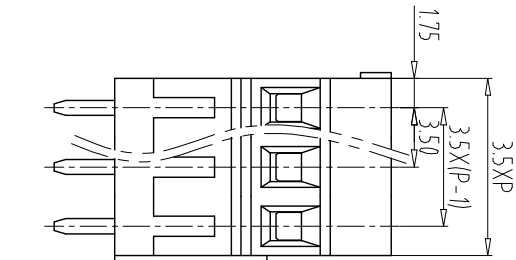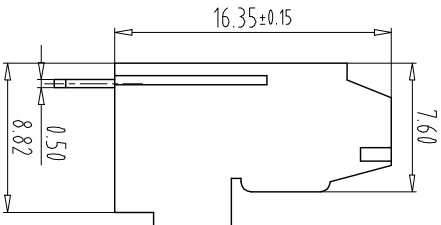

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)
3.Screw: Steel(M2.0,Zn Plated)
4.Cage: Brass(Ni Plated)


NOTES3:
1.Pitch: 3.5mm Poles: 02-24P
2.Stripping length: 6-7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
UL0-TB11 - 38H/3.5 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

PCB layout



Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44
±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.3	0.3	0.2	0.2	0.3	0.3	0.2	0.3
0.3	0.3	0.2	0.3	0.5					

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.11	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB11-38H/3.5-XXP-Y000A		



DWGNO. UL0TB11Y000A