
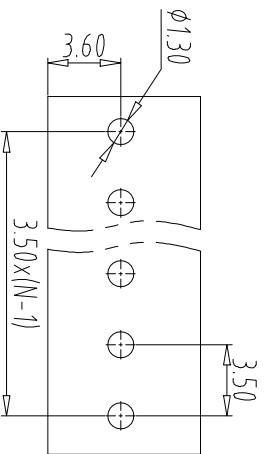
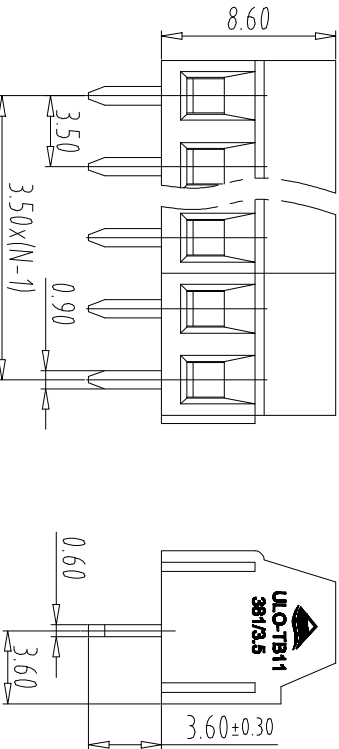


FILE: 2020-D01VUL0		REV		ECN NO.		CONTENT		CHK	DATE
--------------------	--	-----	--	---------	--	---------	--	-----	------

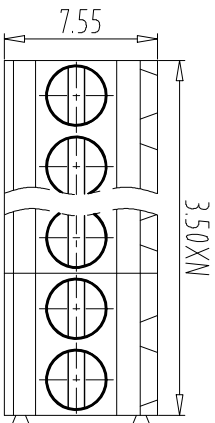

PCB layout

Total Pitch Tolerances		Nominal dimension range																—	//
in mm		in mm																	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
6									5									0.2	0.3

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2 Wire range: 16~26AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(kV)	2.5kV
Rate Voltage(V)	130V
Rate Current(A)	10A

2 Wire range: 0.5-1.0mm²

NOTES2:

- 1.Housing(2P): PA66(UL94V-0)
- 2.Housing(3P): PA66(UL94V-0)
- 3.Solder Pin: Brass(Sn Plated)
- 4.Screw: Steel(M2.0,Zn Plated)
- 5.Cage: Brass(Ni Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB11 - 381/35 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.10	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB11-381/35-XXP-Y000A	A4	
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB11Y000A	