





FILE: 2020-D01VUL0							
REV		ECN NO.		CONTENT		CHK	
						DATE	

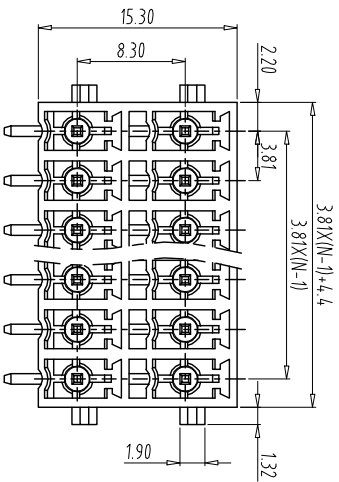

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V//8A
2. withstanding voltage: AC1600V/1Min
- IEC Standard
- 1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

- NOTES2:
- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

- NOTES3:
- 1.Pitch: 3.81mm Poles: 2x(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB13 - 15KNRHG/3.81 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements

Series NO. Code

- color:
- 1:Grey 2:Blue 3:Black
- 4:Green 5:Orange 6:Red
- 7:transparent 8:Yellow 9:White

PCB Layout

Total Pitch Tolerances												Nominal dimension range							
in mm												in mm							
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3
6									5									4	0.2
																			0.3
																			0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.28	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB13-15KNRHG/3.81-XP-Y000A		
				DWGNO.	UL0TB13Y000A



NINGBO UL0 ELECTRONICS CO., LTD.

NINGBO UL0 ELECTRONICS CO., LTD.

UL0TB13Y000A