



FILE: 2020-D01VUL0					
REV	ECN NO.	CONTENT		CHK	DATE

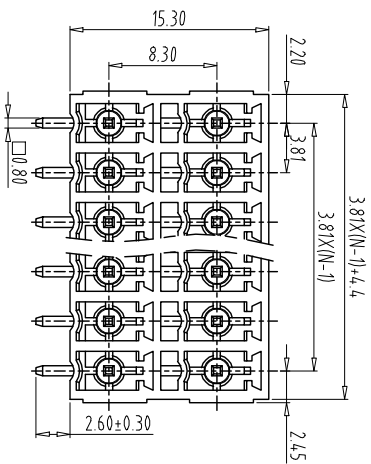

NOTES1:
UL Standard
1. Rating voltage/current: 300V//8A
2. withstanding voltage: AC1600V/1Min
IEC Standard
1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(5n Plated)

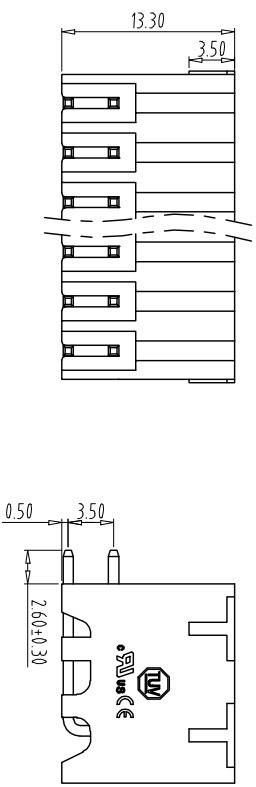

NOTES3:
1.Pitch: 3.81mm Poles: 2x(02-24)P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

UL0-TB13 - 15KNRH/381 - XXP - Y 0 0 0A


Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

PCB Layout

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320
to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
6	5	5	5	5	5	5	5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.26	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB13-15KNRH/381-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB13Y000A