


FILE: 2020-D01VUL0					
REV	ECN NO.	CONTENT		CHK	DATE

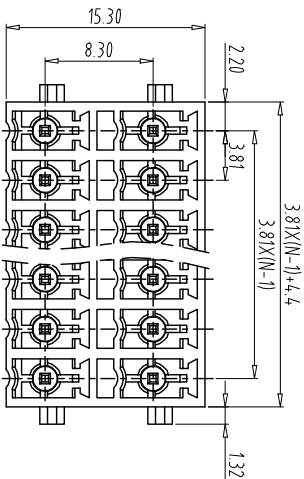

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V//8A
2. withstanding voltage: AC1600V/1Min
- IEC Standard
- 1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 2x(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

UL0-TB13 - 15KNVHG/3.81 - XXP - Y 0 0 0A

Certificate Factory poles Customer requirements




Series NO. Code

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

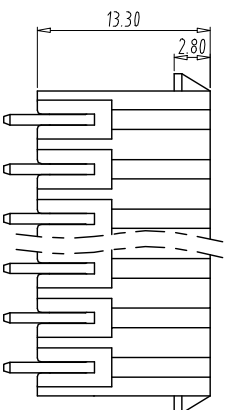

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	0	over	0	over	0	over	0	over	0
30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	all
53	70	90	115	150	200	250	320	10	100
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
6	6	6	6	6	6	6	6	6	6

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.26	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB13-15KNVHG/3.81-XXP-V000A		

