

FILE: 2020-D01VUL0					
REV		ECN NO.		CONTENT	
				CHK	DATE

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
2.withstanding voltage: AC1600V/1min
3 Wire range:28-16AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	160V
Rate Current(A)	8A

NOTES2:

- 1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)
3. Torque Value: M2 0.2Nm
4. Wire range: 15mm²

NOTES3:

- 1.Pitch: 3.81mm Poles:02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance
4.Stripping length: 6-7mm



How to order

UL0-TB13 - 15KR/3.81 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

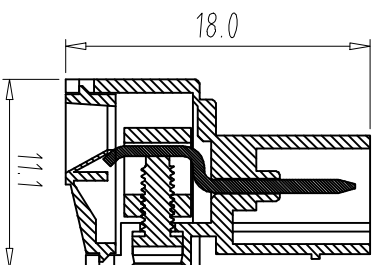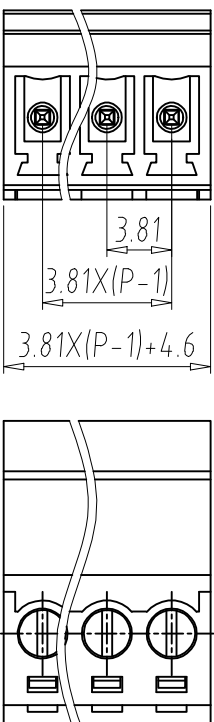

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2
±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3
±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	2021.04.06	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4 1/1
APP.	DATE	NAME	UL0-TB13-15KR/3.81-XXP-Y000A		
				DWGNO.	UL0TB13Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.