


FILE: 2020-D01VUL0		REV		ECN NO.		CONTENT		CHK	DATE
--------------------	--	-----	--	---------	--	---------	--	-----	------

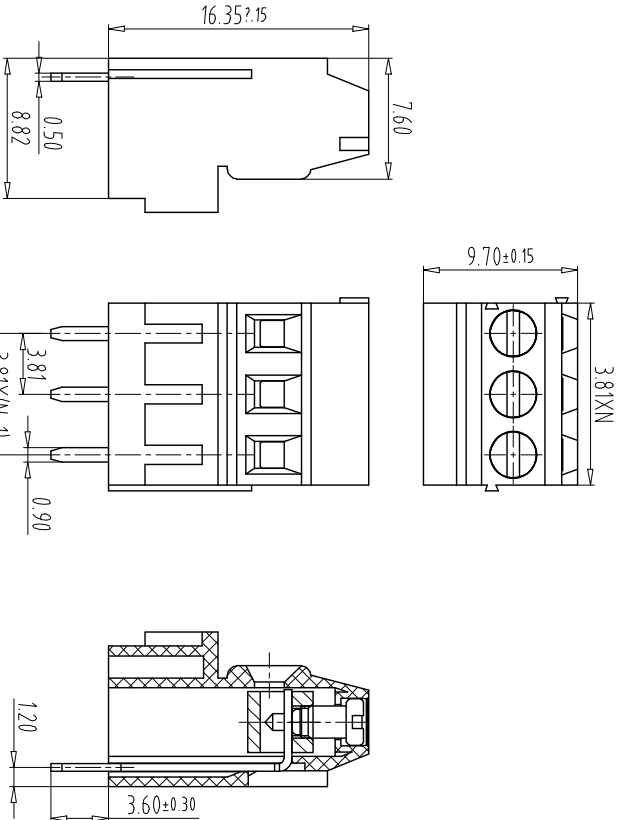

NOTES:
UL Standard
1. Rating voltage/current: 150V/10A
2 Wire range: 16~26AWG
IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	2.5kV
Rate Voltage(V)	130V
Rate Current(A)	10A

2 wire range: 0.2~1.0mm²

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(Sn Plated)
3.Cage: Brass(Ni Plated)
4.Screw: Steel(M2.0,Zn Plated)

NOTES3:
1.Pitch: 3.81mm Poles: 02~24P
2.Stripping length: 6~7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order


UL0-TB7 - 38H/3.81 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances												Nominal dimension range												T	≡	—	//
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	100	100	150	150	150	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	
6												5												4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.14	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB7-38H/3.81-XXP-Y000A		
				DWGNO.	UL0TB7Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.

