



FILE: 2020-D01VUL0					
REV	EC.N NO.	CONTENT		CHK	DATE

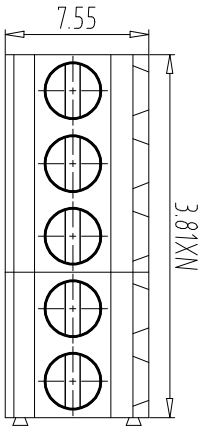



NOTES1:
UL Standard
1. Rating voltage/current: 300V/12A
3.Wire range:16-26AWG
IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(KV)	2.5KV
	Rate Voltage(V)	130V
	Rate Current(A)	10A

2.Wire range: 0.2-1.0mm²

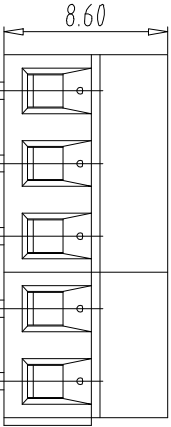

NOTES2:
1.Housing: PA66(UL94V-0)
2.Screw:Steel(M2.5/Zn Plated)
3.Spring: Brass(Tin Plated)
4.Block: Brass(Ni Plated)



NOTES3:
1.Pitch: 3.81mm Poles: 02-24P
2.Stripping length: 6-7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB17 - 381/381 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements
Series NO. Code

color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:white

PCB layout

A		Total Pitch Tolerances										Nominal dimension range																																			
		in mm										in mm																																			
over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to																				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over																				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to																					
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	to	to	to	to	to	to	to																					
±0.18		±0.20		±0.25		±0.3		±0.35		±0.44		±0.55		±0.70		±0.75		±0.20		±0.25		±0.30		±0.35		±0.44		±0.55		±0.70		±0.80		±0.90		0.2		0.3		0.3		0.2		0.3		0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.02	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB17-381/381-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

DWGNO.

UL0TB17Y000A