

FILE: 2020-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	2A	2A	2A
Rated Voltage	150V	150V	150V

2.Wire range: 24~20AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	6A

2.wire range: 0.2-1.0mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(Sn Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless Steel

NOTES3:

- 1.Pitch: 2.54mm Poles: 02-24P
- 2.Stripping length: 11mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance




How to order

ULO-TB18 - 141R/2.54 - XXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements

color:

- | | |
|----------|---------------|
| 1:Grey | 6:Red |
| 2:Blue | 7:transparent |
| 3:Black | 8:Yellow |
| 4:Green | 9:White |
| 5:Orange | |

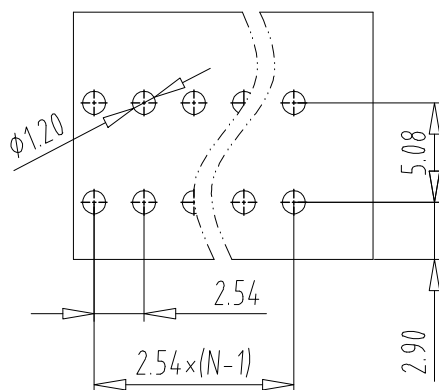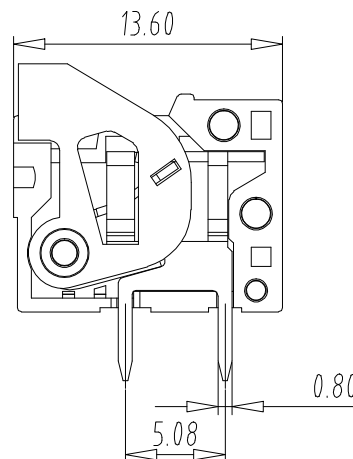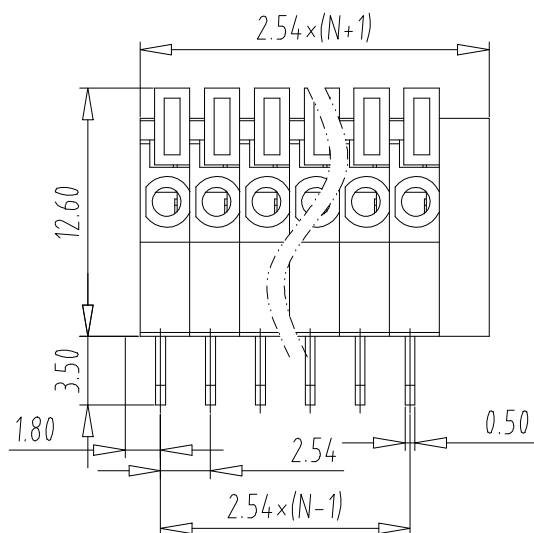

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$-$ //		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10				to 100	to 150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	LZW	DATE	21.05.08	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE				
NINGBO ULO ELECTRONICS CO.,LTD.				NAME	ULO-TB18-141R/2.54-XXP-Y000A	
宁波欧路电子有限公司				DWGNO.	ULOTB18Y000A	