


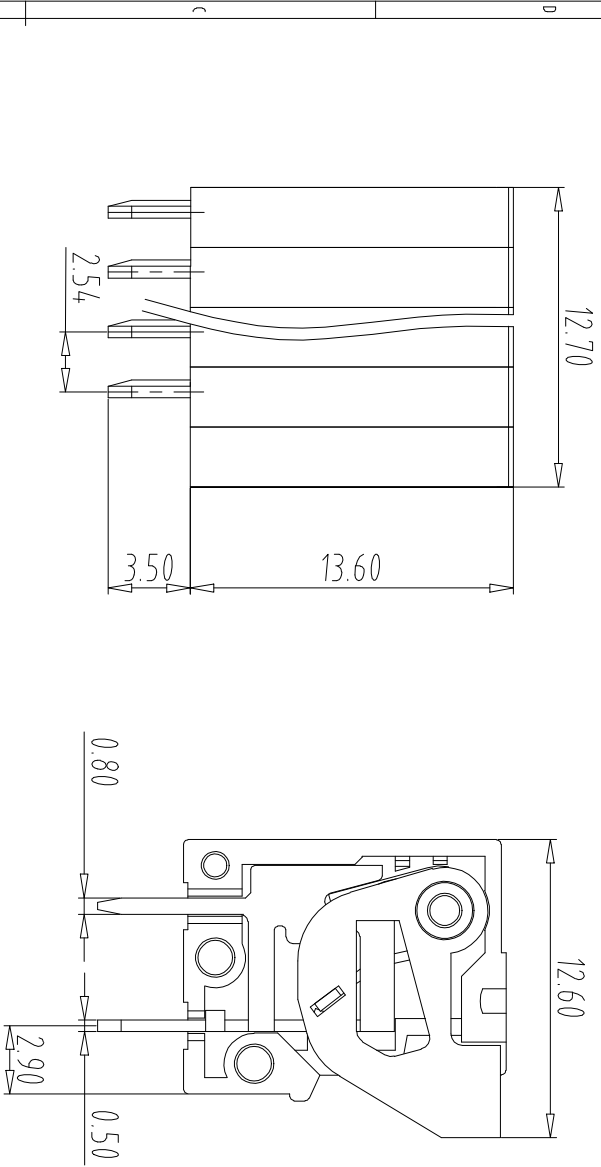

NOTES:
UL Standard

1	Use group	B	C	D
	Rated Current	2A	2A	2A
	Rated Voltage	150V	150V	150V

2 Wire range: 24~20AWG

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	II
	Rated Impulse Voltage(kV)	2.5kV
	Rated Voltage(V)	130V
	Rated Current(A)	6A

2 wire range: 0.2-1.0mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Clamp: Phosphor Bronze(Sn Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring : Stainless Steel

NOTES3:

- 1.Pitch: 2.54mm Poles: 02-24P
- 2.Stripping length: 11mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance


How to order

UL0-TB18 - 14/W/254 - XXP - Y 0.0 0A

Certificate Factory poles
Series NO. Code

Customer requirements
color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

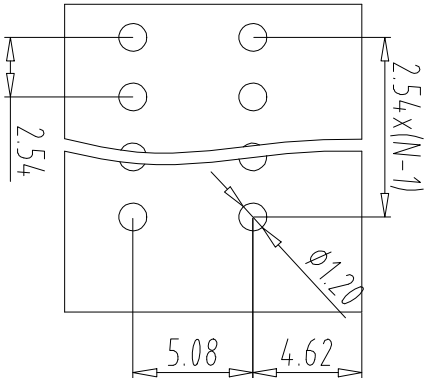

Total Pitch Tolerances										Nominal dimension range										⊥	≡	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	100	150	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6									5									4					



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0-TB18Y000A

UL0-TB18-14/W/254-XXP-Y000A