
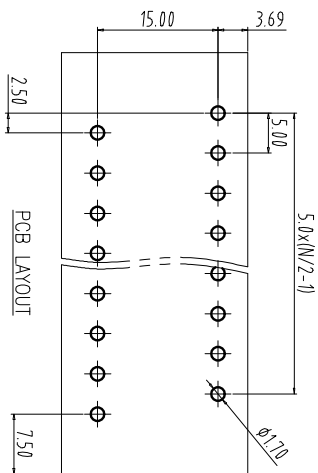





FILE: 2020-D01VUL0

REV	ECN NO.	CONTENT	CHK	DATE

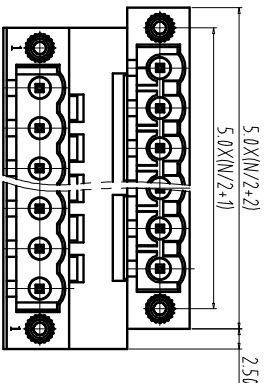

NOTES1:
UL Standard
1. Rating voltage/current: 300V/15A
2.withstanding voltage: AC1600V/1min
IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Pin header1: Copper(Sn Plated)
3.Cover: PA66(UL94V-0)
4.Pin header2: Copper(Sn Plated)
5.Nut: Copperalloy

NOTES3:
1.Pitch: 5.0mm Poles:04-48P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
UL0-TB22 - 2V7M/5.0 - XXP - Y 0.0 0A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances												Nominal dimension range															
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	0	over	0	over	0	100	over				
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	150	over				
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	over				
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	0.2	0.3	0.3	0.2	0.3	0.5				
6												5															

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	2021.03.19	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	UL0-TB22-2V7M/5.0-XXP-Y000A		1/1
NINGBO UL0 ELECTRONICS CO.,LTD.					UL0TB2Y000A