
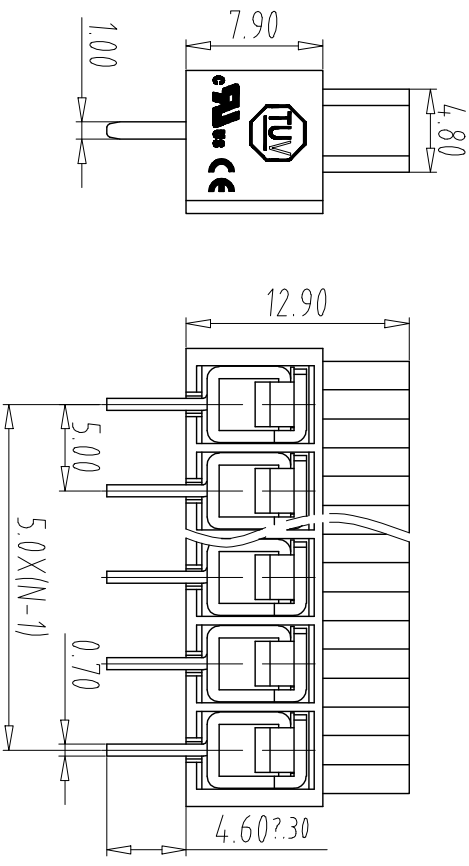
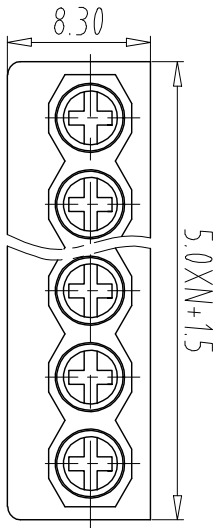


Total Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30

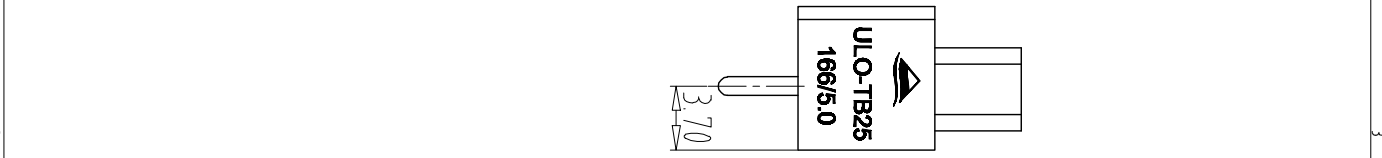

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

Relation Degree	2
Overvoltage Category	2
Rated Insulation Voltage(V)	4.0kV
Rated Voltage(V)	250V
Rated Current(A)	22A

NOTES2:
2. wire range: 1.0-2.5mm²


- NOTES2:
1.Housing: PA66(UL94V-0)
2.Spring: Stainless Steel
3.Solder Pin: Brass(Tin Plated)
4.Screw: Steel(Zn Plated)

NOTES3:
1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
UL0-TB25 - 166/5.0 - XXP - Y 0 0 0 A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.02	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB25-166/5.0-XXP-Y000A		



NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB25Y000A