
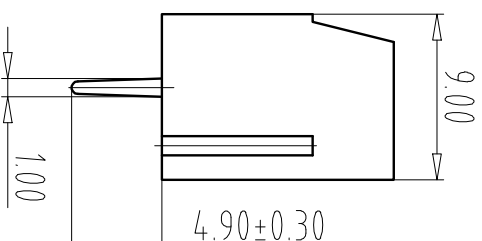
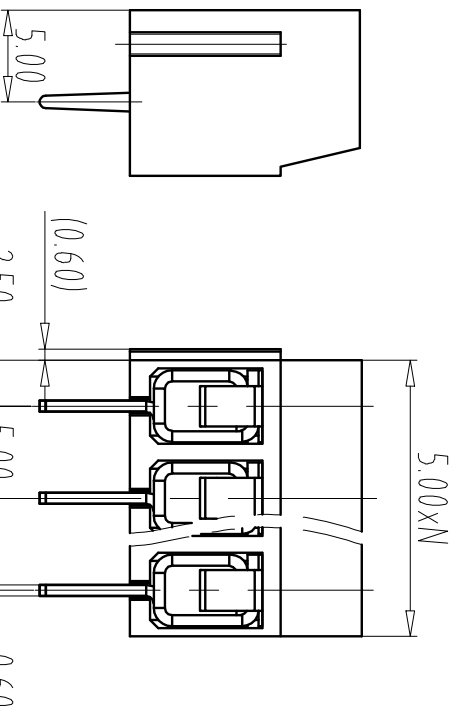


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	



NOTES:

UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 14~22AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	-	2KV	-
Rate Voltage(V)	-	250V	-
Rate Current(A)	-	20A	-

2.wire range: 1.0-2.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Pin: Copper alloy(Sn Plated)
- 3.Screw: Steel(Zn Plated)
- 4.Spring: Stainless steel

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB25	-	305/5.0	-	XXP	-	Y	0 0 0 A
----------	---	---------	---	-----	---	---	---------

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color: _____

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

A	Total Pitch Tolerances	Nominal dimension range		±	—	//

[illegible]

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE	
	DWG.	DATE			MM	SHEET/OF		
CHK.		DATE	22.04.14				1/1	
APP.		DATE				A4		



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

INFILE	ULU-1B25-303
DWGNO	ULOTB25Y000A