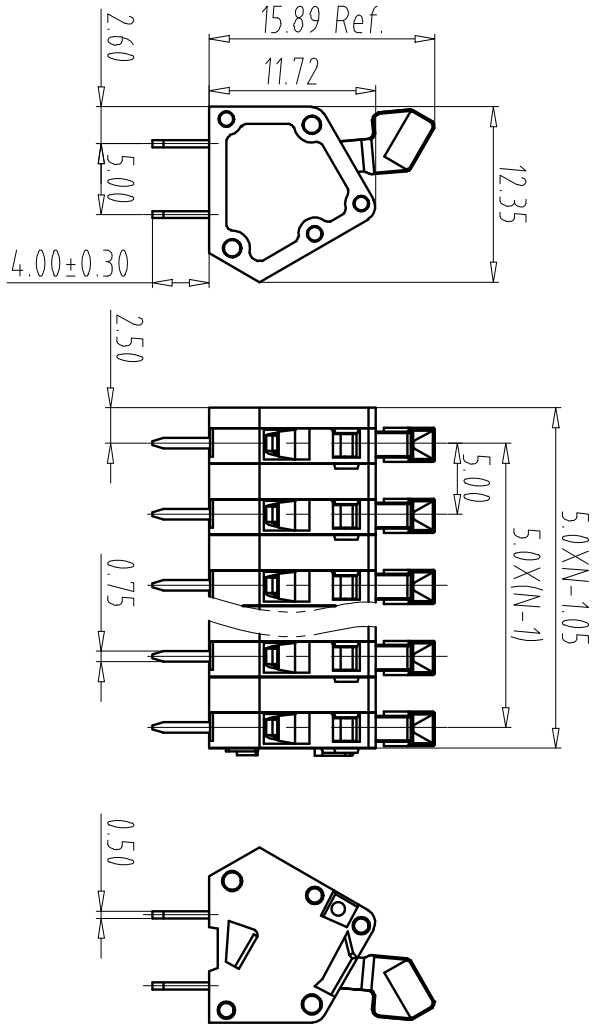


PCB LAYOUT

NOTES1:
UL Standard

Use group	B
Rated Current	6A
Rated Voltage	250V

2. Wire range: 14~28AWG

Pollution Degree	2
Overvoltage Category	I
Rated Impulse Voltage(KV)	4.0KV
Rated Voltage(V)	300V
Rated Current(A)	4A

NOTES2:
2. wire range: 0.2-2.5mm²

NOTES3:
1. Pitch: 5.0mm Poles: 02-24P
2. Stripping length: 8mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

How to order
UL0-IB26 - 24V/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:
1: Grey 6: Red
2: Blue 7: transparent
3: Black 8: Yellow
4: Green 9: White
5: Orange

Total Pitch Tolerances										Nominal dimension range										±	≠	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	150	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	22.04.14	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4
APP	DATE	NAME	UL0-IB26-24V/5.0-XXP-Y000A		1/1
NINGBO UL0 ELECTRONICS CO.,LTD.					UL0TB26Y000A