

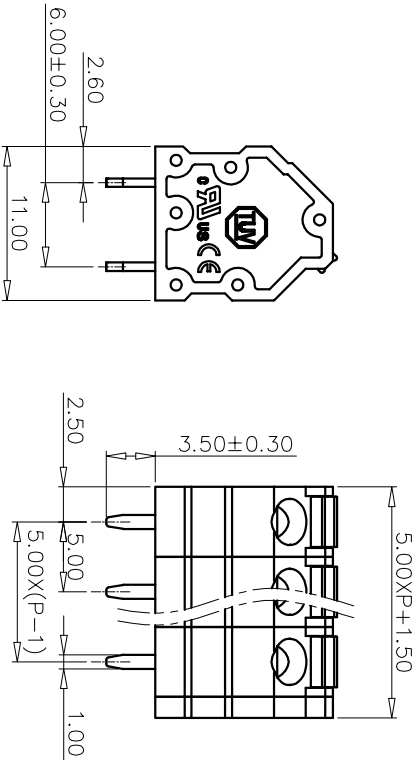


REV	ECN NO.	CONTENT	CHK	DATE



NOTES1:
UL Standard
1.Rating voltage/current: 300V/10A
2.Wire range: 26~16AWG
IEC Standard
1.Rating voltage/current: 320V/17.5A
3.wire range: 0.2~1.5mm²

NOTES2:
1.Housing: PA66(UL94V-0)
2.Cover: PA66(UL94V-0)
3.Button: PA66(UL94V-0)
4.Housing cover: PA66(UL94V-0)
5.Short Conductor: Copper(Sn Plated)
6.Short ConductorB: Copper(Sn Plated)
7.Spring: Stainless Steel

NOTES3:
1.Pitch: 5.0mm Poles: 02~24P
2.Stripping length: 9~10mm
3.withstanding voltage: AC2000V/1Min
4.Operating temperature: -40℃~+105℃
5.RoHS Compliance


How to order

UL0-TB26 - 550B/5.0 - XXP - Y 0.00A

Certificate Factory poles
Series NO. Code Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

PCB LAYOUT

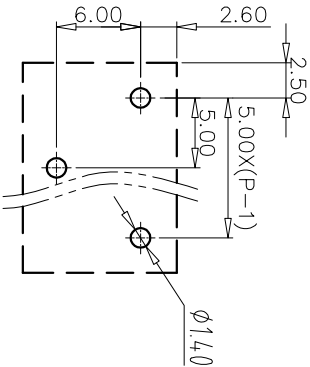

Total Pitch Tolerances										Nominal dimension range										±	=	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	CHK	DATE	21.07.23	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	UL0-TB26-550B/5.0-XXP-Y000A
				DWGNO	UL0TB26Y000A



NINGBO UL0 ELECTRONICS CO., LTD.

UL0-TB26-550B/5.0-XXP-Y000A