




FILE: 2021-D01VUL0									
REV		ECN NO.		CONTENT		CHK		DATE	




NOTES1:
UL Standard
1.Rating voltage/current: 300V/10A
2.Wire range: 26-16AWG
IEC Standard
1.Rating voltage/current: 320V/17.5A
3.wire range: 0.2-1.5mm²

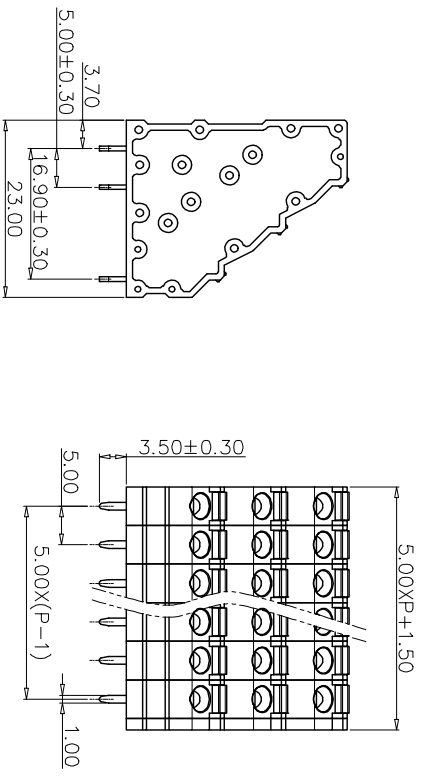

NOTES2:
1.Housing: PA66(UL94V-0)
2.Cover: PA66(UL94V-0)
3.Button: PA66(UL94V-0)
4.Housing cover:PA66(UL94V-0)
5.Long Conductor: Copper(Sn Plated)
6.Short Conductor: Copper(Sn Plated)
7.Spring: Stainless Steel
8.Long Conductor B: Copper(Sn Plated)
NOTES3:
1.Pitch: 5.0mm Poles: 3x(02-24)P
2.Stripping length: 9-10mm
3.withstanding voltage: AC2000V/Min
4.Operating temperature: -40℃~+105℃
5.RoHS Compliance

How to order
UL0-TB26 - 550T/5.0 - 3xXXP - Y 0 0 0A
Certificate Factory poles
Series NO. Code
Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

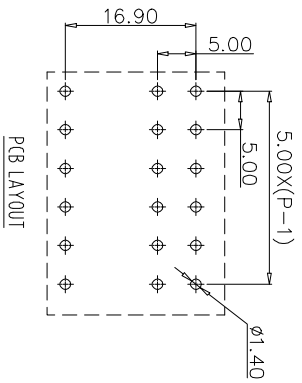

Total Pitch Tolerances		Nominal dimension range							
In mm		In mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	10	all
to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3
0.2	0.3	0.3	0.2	0.3	0.5				

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CKK	DATE	21.07.28	UNITS	MM
CHK		DATE		SCALE	1 : 1
APP.		DATE		NAME	UL0-TB26-550T/5.0-3xXXP-Y000A
				DWGNO.	UL0TB26Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司