

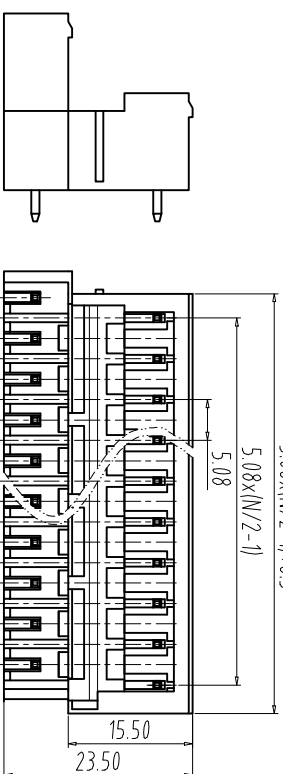


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

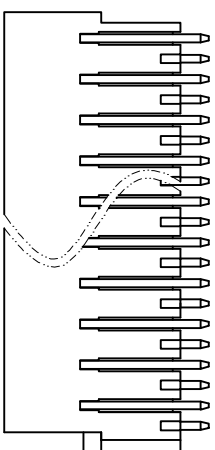

NOTES:

UL Standard

1. Rating voltage/current: 300V/15A

2.withstanding voltage: AC1600V/1Min

IEC Standard

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	10A

NOTES:

1.Housing: PA66(UL94V-0)

2. Solder Pin: Brass (Sn Plated)

NOTES3

1.Pitch: 5.08mm Poles:04-48P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB28 - 2VTC/5.08 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance = — //
---	---------------------------------	----------------------------------	------------------------

ITEM	NAME OF PART		NO. OF PART	Q-TY	MATERIAL		NOTE
DWG.	L Z W	DATE	2021.03.19		MM	SHEET/OF	1/1
CHK.		DATE			SCALE	1:1	
APP.		DATE					



NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO.	UL0TB28Y000A
--------	--------------