
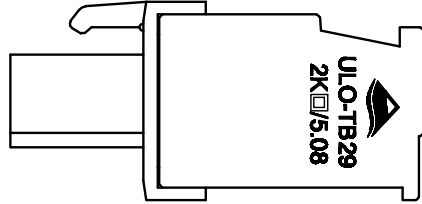
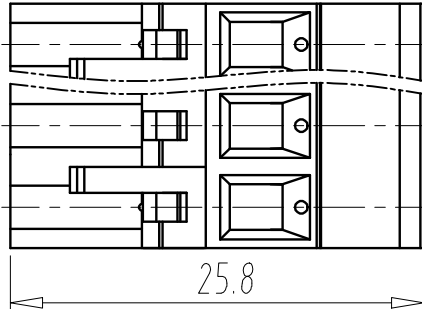
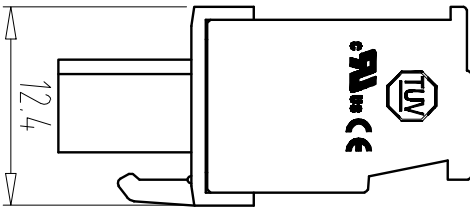
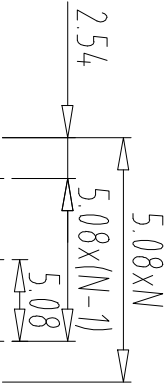


FILE: 2021-D01VUL0

REV EC.N NO.

CONTENT

CHK DATE



NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2. Wire range: 12~28AWG
IEC Standard

1. Pollution Degree	2
Overvoltage category	B
Rated impulse voltage(kV)	4.0kV
Rated Voltage(V)	320V
Rated Current(A)	15A

2. wire range: 10-2.5mm²
3. Torque value: M3, 0.5Nm
NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Block: Brass(Ni Plated)
- 3.Clamp: Phosphor Bronze(Tin Plated)
- 4.Screw: Steel(M2.5,Zn Plated)
- 5.Cover: PA66(UL94V-0)

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

ULQ-TB29 - 2KA/5.08 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances										Nominal dimension range										±	≠	—	//
in mm										in mm													

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	100	150	150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	
6										5										4			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.27	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	ULQ-TB29-2KA/5.08-XXP-Y000A		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司



ULQ-TB29-2KA/5.08-XXP-Y000A