
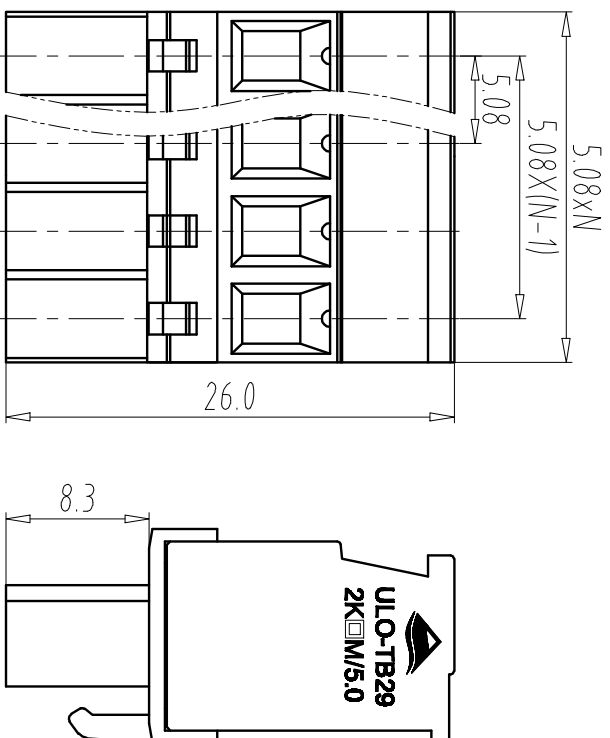


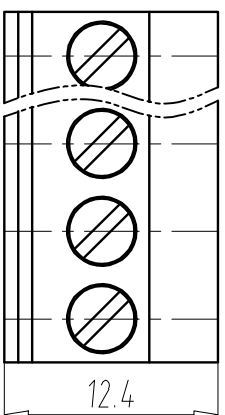

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~28AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	I
Rate Impulse Voltage(KV)	4.0k
Rate Voltage(V)	320V
Rate Current(A)	18A

2.wire range: 1.0-2.5mm²

3. Torque value: M3, 0.5Nm

NOTES:

1.Housing: PA66(UL94V-0)

2.Block: Brass(Ni Plated)

3. Clamp: Phosphor Bronze (Tin Plated)

4. Screw: Steel(M3.0,Zn Plated)

5. Cover: PA66(UL94V-0)

NOTES:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length: 7mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

U/L0-TB29 - 2KB/5.08 - XXP - Y 0 0 0 0A

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

A	Total Pitch Tolerances	Nominal dimension range	=	—	//
---	------------------------	-------------------------	---	---	----

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.29	UNITS	MM	SHEET/OF 1/1

CHK.	DATE	SCALE	1:1	A4	
------	------	-------	-----	----	---

APP.	DATE	
		III 0 TR29 3KR/5 08 YPE Y000A

NINGBO UL0 ELECTRONICS CO.,LTD. NAME
UL0-1027-2ND,3-ND-VAL -1000M

NINGBO UL0 ELECTRONICS CO.,LTD
宁波欧路电子有限公司

DWG NO.	ULOTB29Y000A
---------	--------------