

FILE: 2021-D01VULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.

Use group	B
Rated Current	6A
Rated Voltage	250V

2.Wire range: 14~28AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	300V
Rate Current(A)	4A

2.wire range: 0.2-2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Pin header: Copper alloy(Sn Plated).

3.Button: POM(UL94HB)

4.Cover: PA66(UL94V-0)

5.Spring: Stainless steel

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length: 8mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance



How to order

ULO-TB32 - 240/5.08 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

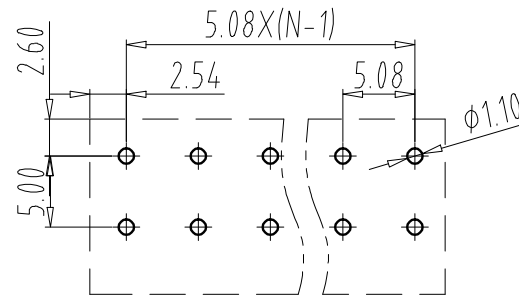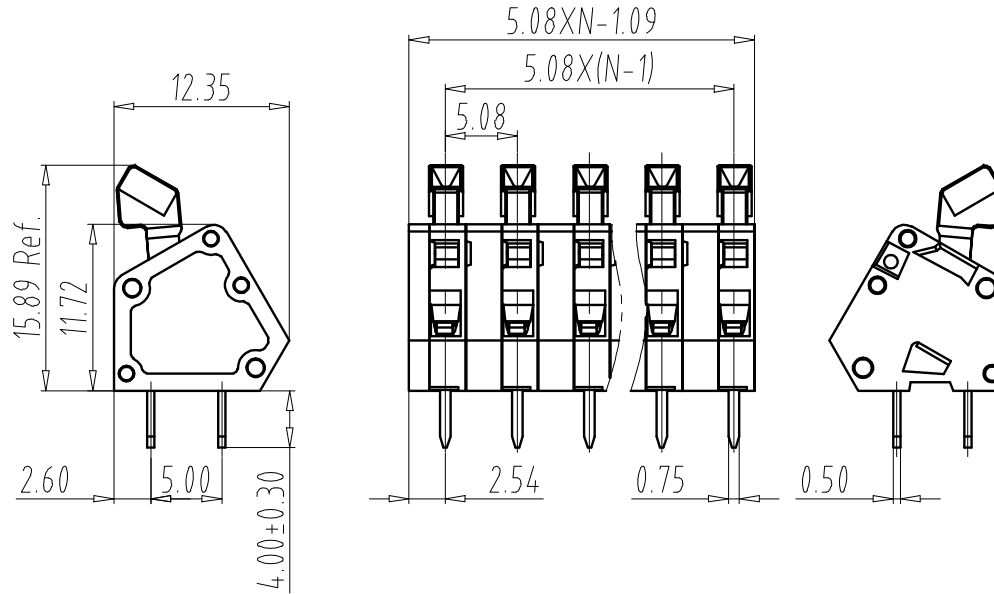

PCB LAYOUT

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$	$//$		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10		all	to 100	to 150	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.04.14	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB32-240/5.08-XXP-Y000A
				DWGNO.	ULOTB32Y000A



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司