


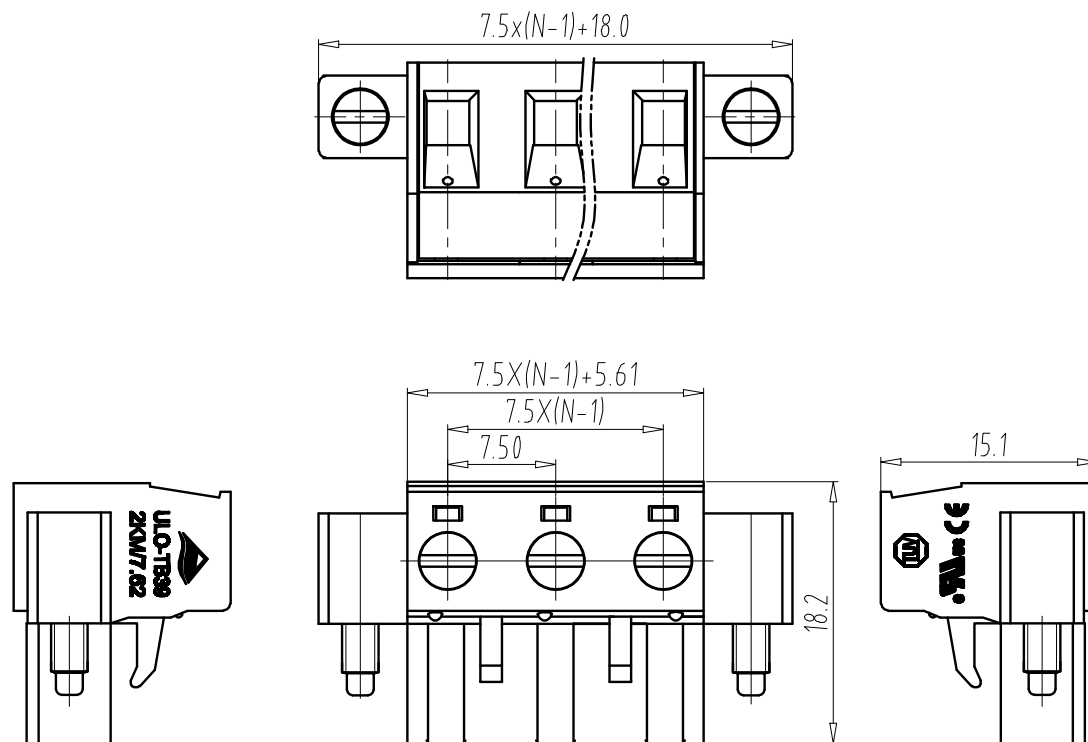

UL Standard

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2.Wire range:28-12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	16A

2.Wire range:1.0-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94 V-0)
- 2.Cover:PA66(UL94 V-0)
- 3.Block:Brass(Ni Plated)
- 4.Clamp:Phosphor Brons(Tin Plated)
- 5.Screw:Steel(Zn Plated)
- 6.Screw:Steel(Zn Plated)

NOTES3:

- 1.Pitch: 7.5mm Poles: 02-24P
2.Stripping length: 7.5mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

ULO-TB33 - 2KM/7.5 - XXP - Y 0 0 0A

Certificate Series NO.	Factory poles Code	Customer requirements
---------------------------	-----------------------	--------------------------

color:

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.05.03	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB33-2KM/7.5-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	ULOTB33Y000A		