

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

2.Wire range: 12~28AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0K
Rate Voltage(V)	400V
Rate Current(A)	10A

2.wire range: 1.0-2.5mm²

3. Torque value: M3, 0.5Nm

NOTES2

1.Housing: PA66(UL94V-0)

2. Block: Brass (Ni Plated)

3.Clamp: Phosphor Bronze(Tin Plated)

4. Screw: Steel(M3.0,Zn Plated)

5.Cover: PA66(UL94V-0)

6.5 Screw: Steel(M2.5,Zn Plated)

NOTES3

Pitch: 7.5mm Poles: 02-24P

2 Stripping length: 7mm

3 Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB35 - 2KAM/7.5 - XXP - Y 0 0 0 A

Certificate Series NO.	Factory Code	poles

Customer requirements

- color:






1:Grey 6:Red

2:Blue 7:transparent

3:Black
8:Yellow

1000

5:Orange

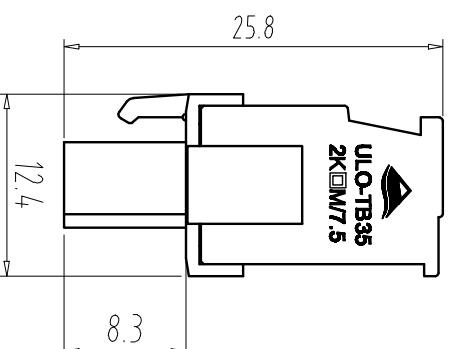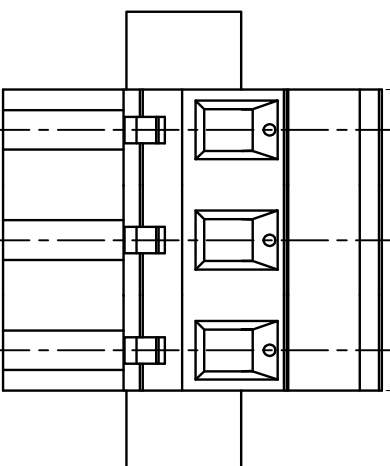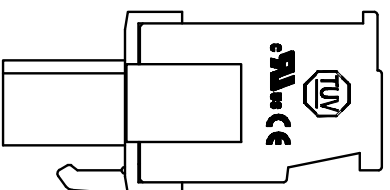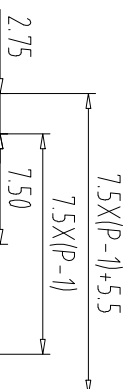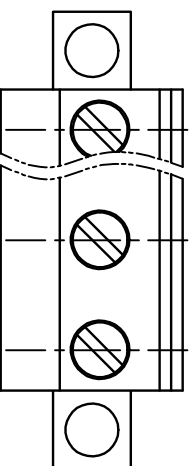

A	Total Pitch Tolerances	Nominal dimension range		=	-	//

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.04	UNITS	MM
					SHEET/OF
					1/1

CHK.	DATE	SCALE	1:1	A4		
APP.	DATE					

 NINGBO UL0 ELECTRONICS CO., LTD. 宁波欧路电子有限公司	NAME	UL0-1B35-ZKAM / 5-XXP-Y000A
	DWGNO	UL0TB35Y000A

The diagram shows a vertical rectangular structure, possibly a wall or a container, with a series of horizontal lines and a wavy line at the bottom.