

FILE: 2021-D01VUL0

5

4

3

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	-	10A
Rated Voltage	300V	-	300V

2 Wire range: 12~28AWG

IEC Standard

1

Insulation Degree	2
Overvoltage Category	II
Rated impulse voltage(kV)	4.0kV
Rated voltage(V)	400V
Rated Current(A)	18A

2 wire range: 10-2.5mm²

3 Torque value: M3, 0.5Nm

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Block: Brass(Ni Plated)
- 3.Clamp: Phosphor Bronze(Tin Plated)
- 4.Screw: Steel(M3,Zn Plated)
- 5.Cover: PA66(UL94V-0)

NOTES3:

- 1Pitch: 7.62mm Poles: 02-24P
- 2 Stripping length: 7mm
- 3 Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order


UL0-TB41 - 2KA/7.62 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange





7.62X(P-1)+5.60

7.62X(P-1)

2.63

7.62

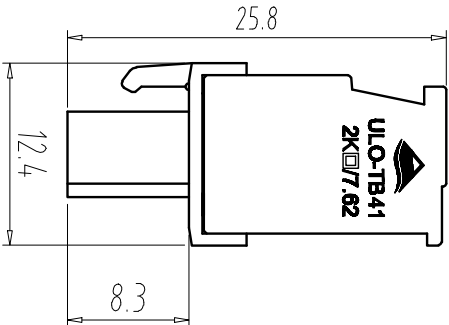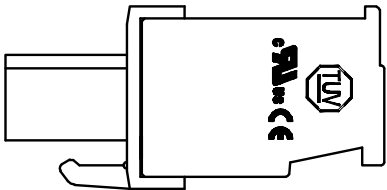

Total Pitch Tolerances												Nominal dimension range												—		//	
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	10	all	0	100	over	100	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150	150	150	150	150	150	
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	
6												5												4		3	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.04	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB41-2KA/7.62-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO.	UL0TB41Y000A