
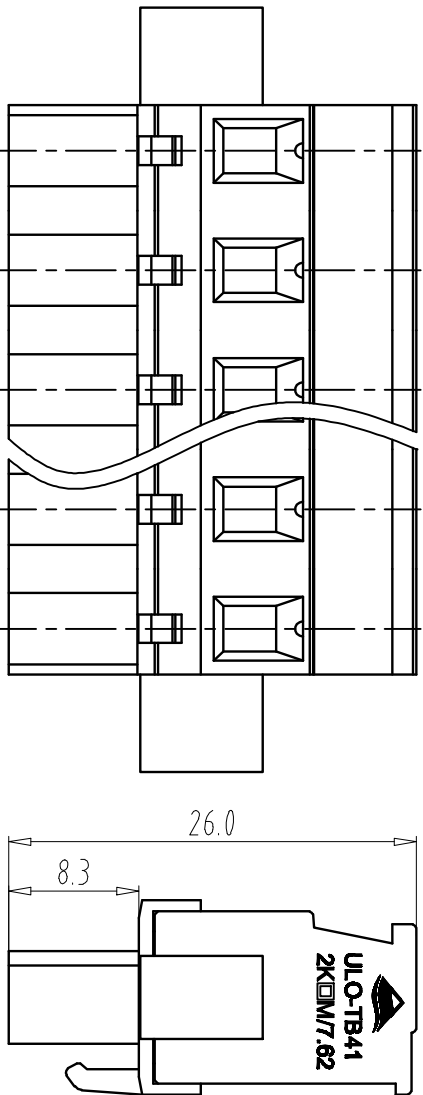


FILE: 2020-D01VUL0					
REV		EC.N NO.		CONTENT	
				CHK	DATE

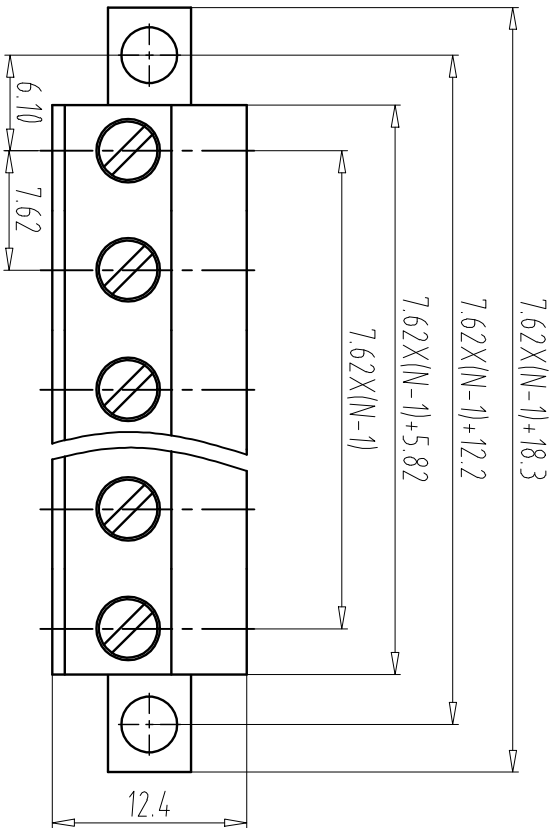

NOTES:

UL Standard

1. Use group

B	C	D
Rated Current 15A	—	10A
Rated Voltage 300V	—	300V

2. Wire range: 28-12AWG

IEC Standard

1. Pollution Degree

2

2. Overvoltage Category

III

Rate Impulse Voltage(kV)

4.0kV

Rate Voltage(V)

320V

Rate Current(A)

18A

2. Wire range: 1.0-2.5mm²

3. Torque value: M3, 0.5Nm

NOTES2:

- Housing: PA66(UL94V-0)
- Cover: PA66(UL94V-0)
- Cage: Brass(Ni Plated)
- Clamp: Phosphor Bronze(Ni Plated)
- Screw: Steel(Zn Plated/M2.0)

NOTES3:

1. Pitch: 7.62mm Poles: 02-24P
2. Operating temperature: -40℃~+105℃
3. RoHS Compliance

How to order

UL0-TB41 - 2KBM/7.62 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements

Series NO. Code

color:

1: Grey 2: Blue 3: Black

4: Green 5: Orange 6: Red

7: transparent 8: Yellow 9: White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	20.05.18	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB41-2KBM/7.62-XXP-Y000A		

NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB41Y000A