

NOTES1:

UL Standard

1.

| Use group     | B    | C | D |
|---------------|------|---|---|
| Rated Current | 10A  | — | — |
| Rated Voltage | 300V | — | — |

2.Wire range: 24~16AWG

IEC Standard

1.

|                          |       |
|--------------------------|-------|
| Pollution Degree         | 2     |
| Overvoltage Category     | III   |
| Rate Impulse Voltage(KV) | 2.5KV |
| Rate Voltage(V)          | 250V  |
| Rate Current(A)          | 10A   |

2.wire range: 0.2~1.5mm<sup>2</sup>






NOTES2:

1.Pitch: 3.50mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

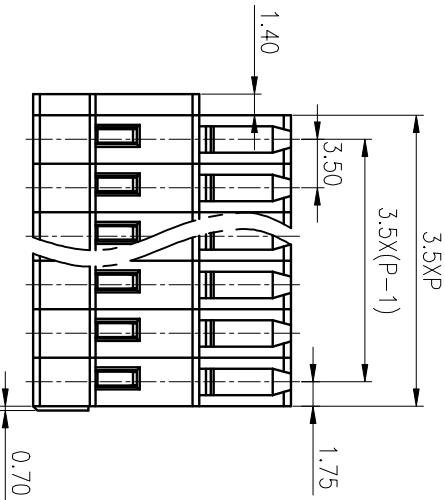

| Total Pitch Tolerances |  | Nominal dimension range |  |   |  |    |  |
|------------------------|--|-------------------------|--|---|--|----|--|
|                        |  |                         |  | = |  | —  |  |
|                        |  |                         |  |   |  | // |  |

| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTE |
|------|--------------|-------------|------|----------|------|
|------|--------------|-------------|------|----------|------|

|      |   |      |   |       |    |          |     |
|------|---|------|---|-------|----|----------|-----|
| DWG. | / | DATE | / | UNITS | MM | SHEET/OF | 1/1 |
|------|---|------|---|-------|----|----------|-----|

|      |      |       |       |    |  |
|------|------|-------|-------|----|--|
| CHK. | DATE | SCALE | 1 : 1 | A4 |  |
|------|------|-------|-------|----|--|

|      |      |      |                      |
|------|------|------|----------------------|
| APP. | DATE | NAME | UL0-TB420-8K-3.5-XXP |
|------|------|------|----------------------|



NINGBO UL0 ELECTRONICS CO.,LTD.  
宁波欧路电子有限公司

|        |   |
|--------|---|
| DWGNO. | X |
|--------|---|