

		2		1	
REV	E.C.N. NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

ج

Use group	B	C	D
Rated Current	20A	-	10A
Rated Voltage	300V	-	300V

2. Wire range: 12~22AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	250V
Rate Current(A)	24A

2. Wire range: 0.5-4.0mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES3

- 1.Pitch: 9.5mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

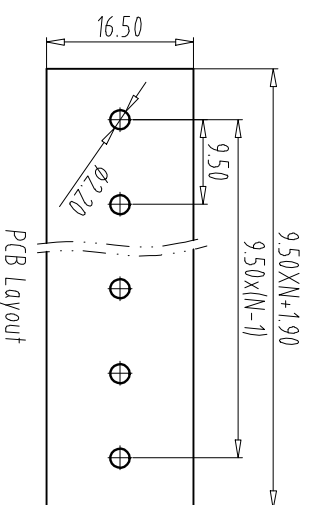


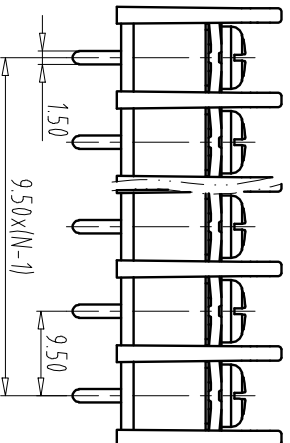
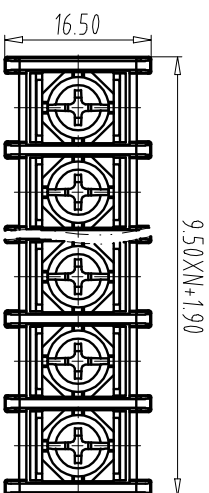
UL0-TB42 - 45S/B - XXP - Y 100A

Certificate Series NO.	Factory Code	poles

Customer requirements

_____color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.06.15	UNITS	MM	SHEET/OF 1/1
G/K.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-1B42-45S/B-XXP-Y100A	
NINGBO UL0 ELECTRONICS CO.,LTD			DWGNO.	UL01B42Y100A	
 宁波欧路电子有限公司					