

NOTES:

UL Standard

- | Use group | B | C | D |
|---------------|------|---|------|
| Rated Current | 20A | – | 10A |
| Rated Voltage | 300V | – | 300V |

2. Wire range: 12~22AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	24A

2. Wire range: 0.5-2.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES:

1. Pitch: 8.25mm Poles: 02-24P
2. Operating temperature: -40°C ~ +105°C
3. RoHS Compliance

How to order




UL0-TB43 - 35R/B - XXP - Y 100A

Certificate Series NO.	Factory Code	poles

Customer requirements

—color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

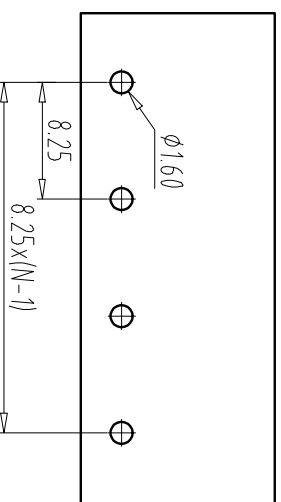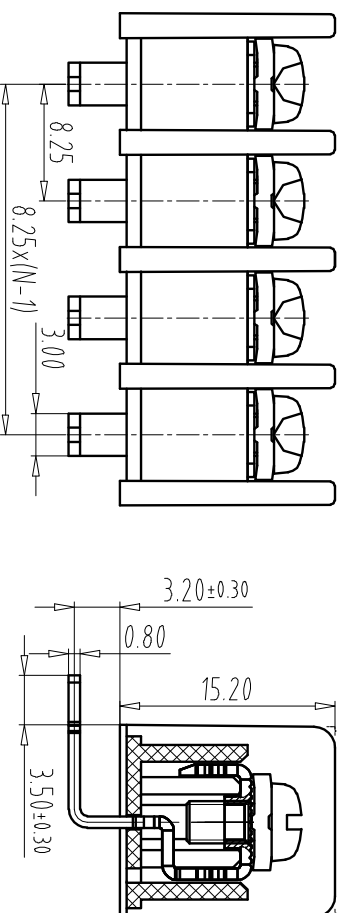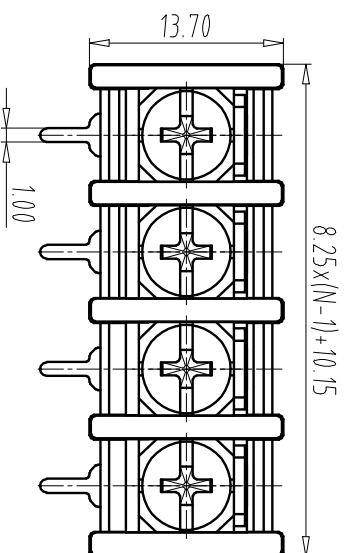

Total Pitch Tolerances	Nominal dimension range	+	-	//
A				

over		over		in min		over		over		in min		over		over		over		over		over	
0.18	0.20	-0.25	+3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.2	0.3
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	100	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZ W	DATE 21.06.16	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE				
NINGBO ULIO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			NAME	UL0-TB43-35R/B-XP-Y100A	
			DWGNO	UL0TB43Y100A	